

# **Technical Information Manual**

Revision n. 13

29 April 2013

**MOD. V1751**

*4/8 CH. 10BIT*

*2/1 GS/s DIGITIZER*

**MANUAL REV.13**

**NPO:**

**00105/08:V1751x.MUTx/13**

CAEN will repair or replace any product within the guarantee period if the Guarantor declares that the product is defective due to workmanship or materials and has not been caused by mishandling, negligence on behalf of the User, accident or any abnormal conditions or operations.


**CAEN declines all responsibility for damages or injuries caused by an improper use of the Modules due to negligence on behalf of the User. It is strongly recommended to read thoroughly the CAEN User's Manual before any kind of operation.**



*CAEN reserves the right to change partially or entirely the contents of this Manual at any time and without giving any notice.*

### **Disposal of the Product**

*The product must never be dumped in the Municipal Waste. Please check your local regulations for disposal of electronics products.*

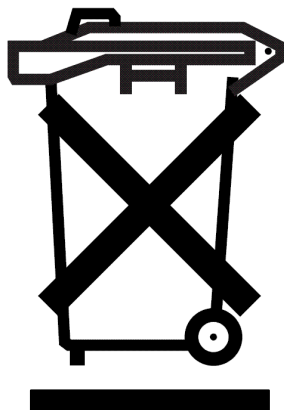

**MADE IN ITALY** : We stress the fact that all the boards are made in Italy because in this globalized world, where getting the lowest possible price for products sometimes translates into poor pay and working conditions for the people who make them, at least you know that who made your board was reasonably paid and worked in a safe environment. (this obviously applies only to the boards marked "MADE IN ITALY", we can not attest to the manufacturing process of "third party" boards).

---

## TABLE OF CONTENTS

<b>SAFETY NOTICES .....</b>	<b>7</b>
<b>1. GENERAL DESCRIPTION.....</b>	<b>8</b>
1.1. OVERVIEW .....	8
1.2. BLOCK DIAGRAM .....	11
<b>2. TECHNICAL SPECIFICATIONS .....</b>	<b>12</b>
2.1. PACKAGING AND COMPLIANCY .....	12
2.1.1. Supported VME Crates .....	12
2.2. POWER REQUIREMENTS .....	12
2.3. FRONT PANEL.....	13
2.4. EXTERNAL CONNECTORS.....	14
2.4.1. ANALOG INPUT connectors.....	14
2.4.2. CONTROL connectors.....	15
2.4.3. ADC REFERENCE CLOCK connectors .....	15
2.4.4. Digital I/O connectors .....	16
2.4.5. Optical LINK connector .....	16
2.5. OTHER FRONT PANEL COMPONENTS .....	17
2.5.1. Displays .....	17
2.6. INTERNAL COMPONENTS .....	18
2.7. TECHNICAL SPECIFICATIONS TABLE .....	20
<b>3. FUNCTIONAL DESCRIPTION.....</b>	<b>21</b>
3.1. ANALOG INPUT.....	21
3.1.1. Single ended input .....	21
3.1.2. Differential input .....	21
3.2. CLOCK DISTRIBUTION .....	22
3.2.1. Direct Drive Mode.....	23
3.2.2. PLL Mode .....	23
3.2.3. Trigger Clock.....	23
3.2.4. Output Clock.....	23
3.2.5. AD9510 programming .....	23
3.2.6. PLL programming .....	23
3.2.7. Direct Drive programming .....	24
3.2.8. Configuration file .....	24
3.2.9. Multiboard synchronization.....	24
3.3. ACQUISITION MODES .....	25
3.3.1. Channel calibration.....	25
3.3.1.1. Normal mode self calibration .....	25
3.3.1.2. Dual Edge Sampling mode self calibration .....	25
3.3.2. Acquisition run/stop.....	25
3.3.3. Acquisition Triggering: Samples and Events.....	26

3.3.3.1.	Custom size events .....	27
3.3.4.	<i>Event structure</i> .....	28
3.3.4.1.	Header .....	28
3.3.4.2.	Samples .....	28
3.3.4.3.	Event format example .....	29
3.3.5.	<i>Acquisition Synchronization</i> .....	30
3.3.6.	<i>Temperature monitor and power down</i> .....	31
3.3.6.1.	ADC chips temperature readout .....	31
3.3.6.2.	ADC chips over temperature protection .....	31
3.4.	TRIGGER MANAGEMENT .....	32
3.4.1.	<i>External trigger</i> .....	32
3.4.2.	<i>Software trigger</i> .....	32
3.4.3.	<i>Local channel auto-trigger</i> .....	33
3.4.3.1.	Trigger coincidence level .....	34
3.4.4.	<i>Trigger distribution</i> .....	36
3.5.	FRONT PANEL I/OS .....	37
3.5.1.	<i>Mode 0: REGISTER</i> .....	39
3.5.2.	<i>Mode 1: TRIGGER</i> .....	39
3.5.3.	<i>Mode 2: nBUSY/nVETO</i> .....	39
3.5.3.1.	nBusy signal .....	39
3.5.3.2.	nVETO signal.....	39
3.5.3.3.	nTrigger signal .....	39
3.5.3.4.	nRun signal.....	40
3.5.4.	<i>Mode 3: OLD STYLE</i> .....	40
3.5.4.1.	nClear_TTT signal .....	40
3.5.4.2.	Busy signal .....	40
3.5.4.3.	DataReady signal.....	40
3.5.4.4.	Trigger signal .....	40
3.5.4.5.	Run signal.....	40
3.6.	ANALOG MONITOR.....	41
3.6.1.	<i>Trigger Majority Mode (Monitor Mode = 0)</i> .....	41
3.6.2.	<i>Test Mode (Monitor Mode = 1)</i> .....	42
3.6.3.	<i>Buffer Occupancy Mode (Monitor Mode = 3)</i> .....	42
3.6.4.	<i>Voltage Level Mode (Monitor Mode = 4)</i> .....	42
3.7.	TEST PATTERN GENERATOR.....	43
3.8.	RESET, CLEAR AND DEFAULT CONFIGURATION .....	44
3.8.1.	<i>Global Reset</i> .....	44
3.8.2.	<i>Memory Reset</i> .....	44
3.8.3.	<i>Timer Reset</i> .....	44
3.9.	VMEBUS INTERFACE.....	45
3.9.1.	<i>Addressing capabilities</i> .....	45
3.9.1.1.	Base address .....	45

3.9.1.2.	CR/CSR address .....	45
3.9.1.3.	Address relocation .....	46
3.10.	DATA TRANSFER CAPABILITIES .....	47
3.11.	EVENTS READOUT .....	47
3.11.1.	<i>Sequential readout</i> .....	47
3.11.1.1.	SINGLE D32 .....	47
3.11.1.2.	BLOCK TRANSFER D32/D64, 2eVME .....	48
3.11.1.3.	CHAINED BLOCK TRANSFER D32/D64 .....	49
3.11.2.	<i>Random readout (to be implemented)</i> .....	49
3.12.	OPTICAL LINK .....	50
<b>4.</b>	<b>SOFTWARE TOOLS .....</b>	<b>51</b>
<b>5.</b>	<b>INSTALLATION .....</b>	<b>54</b>
5.1.	POWER ON SEQUENCE .....	54
5.2.	POWER ON STATUS .....	54
5.3.	FIRMWARE UPGRADE .....	55
5.3.1.	<i>V1751 Upgrade files description</i> .....	56
<b>6.</b>	<b>TECHNICAL SUPPORT .....</b>	<b>57</b>

---

## ***LIST OF FIGURES***

FIG. 1.1: MOD. V1751 BLOCK DIAGRAM .....	11
FIG. 2.1: MOD. V1751 FRONT PANEL .....	13
FIG. 2.2: MCX CONNECTOR .....	14
FIG. 2.3: AMP DIFFERENTIAL CONNECTOR .....	14
FIG. 2.4: AMP CLK IN/OUT CONNECTOR .....	15
FIG. 2.5: PROGRAMMABLE IN/OUT CONNECTOR .....	16
FIG. 2.6: LC OPTICAL CONNECTOR .....	16
FIG. 2.7: ROTARY AND DIP SWITCHES LOCATION .....	19
FIG. 3.1: SINGLE ENDED INPUT DIAGRAM .....	21
FIG. 3.2: DIFFERENTIAL INPUT DIAGRAM .....	21
FIG. 3.3: CLOCK DISTRIBUTION DIAGRAM .....	22
FIG. 3.4: TRIGGER OVERLAP .....	27
FIG. 3.5: EVENT ORGANIZATION .....	29
FIG. 3.6: BLOCK DIAGRAM OF TRIGGER MANAGEMENT .....	32
FIG. 3.7: LOCAL TRIGGER GENERATION .....	33
FIG. 3.8: LOCAL TRIGGER RELATIONSHIP WITH MAJORITY LEVEL = 0 .....	34

FIG. 3.9: LOCAL TRIGGER RELATIONSHIP WITH MAJORITY LEVEL = 1 AND TTVAW $\neq$ 0.....	35
FIG. 3.10: LOCAL TRIGGER RELATIONSHIP WITH MAJORITY LEVEL = 1 AND TTVAW = 0.....	36
FIG. 3.11: MAJORITY LOGIC (2 CHANNELS OVER THRESHOLD; BIT[6] OF CH. CONFIG. REGISTER =0) .....	41
FIG. 3.12: FPGA TEST WAVEFORM.....	43
FIG. 3.13: A24 ADDRESSING.....	45
FIG. 3.14: A32 ADDRESSING.....	45
FIG. 3.15: CR/CSR ADDRESSING.....	45
FIG. 3.16: SOFTWARE RELOCATION OF BASE ADDRESS .....	46
FIG. 3.17: EXAMPLE OF BLT READOUT .....	48
FIG. 3.18: EXAMPLE OF RANDOM READOUT .....	49
FIG. 4.1: BLOCK DIAGRAM OF THE SOFTWARE LAYERS .....	51
FIG. 4.2: WAVEDUMP OUTPUT WAVEFORMS .....	52
FIG. 4.3: CAENSCOPE OSCILLOSCOPE TAB .....	52
FIG. 4.4: CAENUPGRADER GRAPHICAL USER INTERFACE.....	53
FIG. 4.5: DPP CONTROL SOFTWARE GRAPHICAL USER INTERFACE AND ENERGY PLOT .....	53

## ***LIST OF TABLES***

TABLE 1.1: AVAILABLE MODELS, RELATED PRODUCTS AND ACCESSORIES.....	9
TABLE 2.1: MODEL V1751 POWER REQUIREMENTS.....	12
TABLE 2.2: FRONT PANEL LEDS .....	17
TABLE 2.3: MOD. V1751 TECHNICAL SPECIFICATIONS .....	20
TABLE 3.1: BUFFER ORGANIZATION (CASE OF 1.835MSAMPLE/CH MEMORY).....	26
TABLE 3.2: FRONT PANEL LVDS I/OS DEFAULT SETTING.....	37
TABLE 3.3: FEATURES DESCRIPTION WHEN LVDS GROUP IS CONFIGURED AS INPUT .....	38
TABLE 3.4: FEATURES DESCRIPTION WHEN LVDS GROUP IS CONFIGURED AS OUTPUT .....	38

---

## Safety Notices



### CAUTION

**USE ONLY CRATES WITH FORCED COOLING AIR FLOW SINCE  
OVERHEAT MAY DAMAGE THE MODULE!**



### CAUTION

**V1751 CANNOT BE OPERATED WITH CAEN CRATES VME8001/8002**



### CAUTION

**ALL CABLES MUST BE REMOVED FROM THE FRONT PANEL  
BEFORE EXTRACTING THE BOARD FROM THE CRATE!**

---

# 1. General description

---

## 1.1. Overview

The Mod. V1751 is a 1-unit wide VME 6U module housing a 8 Channel 10 bit 1 GS/s Flash ADC Waveform Digitizer with 1 V<sub>pp</sub> input dynamic range on single ended MCX coaxial connectors. Versions featuring a 1 V<sub>pp</sub> differential input full scale range are also available (see Table 1.1). For single ended versions, the DC offset is adjustable via a 16-bit DAC on each channel in the  $\pm 0.5$  V range. The Mod. V1751 can work also as 4 Channel 10 bit 2 GS/s Flash ADC Waveform Digitizer (Dual Edge Sampling).

The module features a front panel clock/reference In/Out and a PLL for clock synthesis from internal/external references. The data stream is continuously written in a circular memory buffer. When the trigger occurs, the FPGA writes further N samples for the post trigger and freezes the buffer that then can be read via VME or Optical Link. The acquisition can continue without dead-time in a new buffer.

Each channel has a SRAM memory buffer (see Table 1.1 for the available memory sizes) divided in buffers of programmable size (1 – 1024). The size of the memory doubles when working in DES mode. The readout (from VME or Optical link) of a frozen buffer is independent from the write operations in the active circular buffer (ADC data storage).

V1751 supports multi-board synchronization allowing all ADCs to be synchronized to a common clock source and ensuring Trigger time stamps alignment. Once synchronized, all data will be aligned and coherent across multiple V1751 boards

VME and Optical Link accesses take place on independent paths and are handled by the on-board controller, therefore when accessed through Optical Link the board can be operated outside the VME Crate (see § 2.1).

The trigger signal can be provided via the front panel input as well as via the software, but it can also be generated internally with threshold auto-trigger capability. The trigger from one board can be propagated to the other boards through the front panel TRG-OUT.

An Analog Output allows to reproduce a Majority signal, a Test signal, a Buffer Occupancy signal and a programmable Voltage Level.

The Modules VME interface is VME64X compliant and the data readout can be performed in Single Data Transfer (D32), 32/64 bit Block Transfer (BLT, MBLT, 2eVME,





2eSST) and 32/64 bit Chained Block Transfer (CBLT).

The built-in daisy chainable Optical Link is able to transfer data at 80 MB/s, thus it is possible to connect up to eight V1751 (64 ADC channels) or thirty-two (256 ADC channels) to a single Optical Link Controller (Mod. A2818/A3818, see Table 1.1

The V1751 can be controlled and readout through the Optical Link in parallel to the VME interface.


CAEN provides also for this model a Digital Pulse Processing (DPP) firmware for Physics Applications. V1751 digitizers running DPP firmware accept signals directly from the detector and implement a digital replacement of dual gate QDC, discriminator and gate generator.

**Table 1.1: Available models, related products and accessories**

Code	Description
WV1751XAAAAA	V1751 - 4/8 Ch. 10 bit 2/1 GS/s Digitizer: 3.6/1.8MS/ch, EP3C16, SE
WV1751BXAAAA	V1751B - 4/8 Ch. 10 bit 2/1 GS/s Digitizer: 3.6/1.8MS/ch, EP3C16, DIFF
WV1751CXAAAA	V1751C - 4/8 Ch. 10 bit 2/1 GS/s Digitizer: 28.8/14.4MS/ch, EP3C16, SE
WVX1751XAAAA	VX1751 - 4/8 Ch. 10 bit 2/1 GS/s Digitizer: 3.6/1.8MS/ch, EP3C16, SE
WVX1751BXAAA	VX1751B - 4/8 Ch. 10 bit 2/1 GS/s Digitizer: 3.6/1.8MS/ch, EP3C16, DIFF
WVX1751CXAAA	VX1751C - 4/8 Ch. 10 bit 2/1 GS/s Digitizer: 28.8/14.4MS/ch, EP3C16, SE
WA654XAAAAAA	A654 - Single Channel MCX to LEMO Cable Adapter
WA654K4AAAAA	A654 KIT4 - 4 MCX TO LEMO Cable Adapter
WA654K8AAAAA	A654 KIT8 - 8 MCX TO LEMO Cable Adapter
WA659XAAAAAA	A659 - Single Channel MCX to BNC Cable Adapter
WA659K4AAAAA	A659 KIT4 - 4 MCX TO BNC Cable Adapter
WA659K8AAAAA	A659 KIT8 - 8 MCX TO BNC Cable Adapter
WV1718XAAAAA	V1718 - VME-USB 2.0 Bridge
WV1718LCXAAA	V1718LC - VME-USB 2.0 Bridge (Rohs Compliant)
WVX1718XAAAA	VX1718 - VME-USB 2.0 Bridge
WVX1718LCXAA	VX1718LC - VME-USB 2.0 Bridge
WV2718XAAAAA	V2718 - VME-PCI Bridge
WV2718LCXAAA	V2718LC - VME-PCI Bridge (Rohs compliant)
WK2718LCXAAA	V2718KITLC - VME-PCI Bridge (V2718)+PCI Optical Link (A2818)+Optical Fibre 5m duplex (AY2705) (Rohs)
WK2718XAAAAA	V2718KIT - VME-PCI Bridge (V2718) + PCI OpticalLink (A2818) + Optical Fibre 5m duplex (AY2705)
WK2718XBAAAA	V2718KITB - VME-PCI Bridge (V2718) + PCIe Optical Link (A3818A) + Optical Fibre 5m duplex (AY2705)
WVX2718LCXAA	VX2718LC - VME-PCI Bridge
WVX2718XAAAA	VX2718 - VME-PCI Bridge
WKX2718XAAAA	VX2718KIT - VME-PCI Bridge (VX2718) + PCI OpticalLink (A2818) + Optical Fibre 5m duplex (AY2705)
WKX2718XBAAA	VX2718KITB - VME-PCI Bridge (VX2718) + PCIe Optical Link (A3818A) + Optical Fibre 5m duplex (AY2705)
WKX2718LCXAA	VX2718KITLC - VME-PCI Bridge (VX2718) + PCI Optical Link (A2818) + Optical Fibre 5m duplex (AY2705)
WA2818XAAAAA	A2818 - PCI Optical Link
WA3818AXAAAA	A3818A - PCIe 1 Optical Link
WA3818BXAAAA	A3818B - PCIe 2 Optical Link

WA3818CXAAAA	A3818C - PCIe 4 Optical Link
WA317XAAAAAA	A317 - Clock Distribution Cable
WAI2730XAAAA	AI2730 - Optical Fibre 30 m. simplex
WAI2720XAAAA	AI2720 - Optical Fibre 20 m. simplex
WAI2705XAAAA	AI2705 - Optical Fibre 5 m. simplex
WAI2703XAAAA	AI2703 - Optical Fibre 30cm. simplex
WAY2730XAAAA	AY2730 - Optical Fibre 30 m. duplex
WAY2720XAAAA	AY2720 - Optical Fibre 20 m. duplex
WAY2705XAAAA	AY2705 - Optical Fibre 5 m. duplex
WFWDPNGAA51	DPP-PSD - Digital Pulse Processing for Pulse Shape Discrimination (x751)
WFWDPNG0251	DPP-PSD - Digital Pulse Processing for Pulse Shape Discrimination (x751) - 2 Licence Pack
WFWDPNG0551	DPP-PSD - Digital Pulse Processing for Pulse Shape Discrimination (x751) - 5 Licence Pack
WFWDPNG1051	DPP-PSD - Digital Pulse Processing for Pulse Shape Discrimination (x751) - 10 Licence Pack
WFWDPNG2051	DPP-PSD - Digital Pulse Processing for Pulse Shape Discrimination (x751) - 20 Licence Pack

## 1.2. Block Diagram

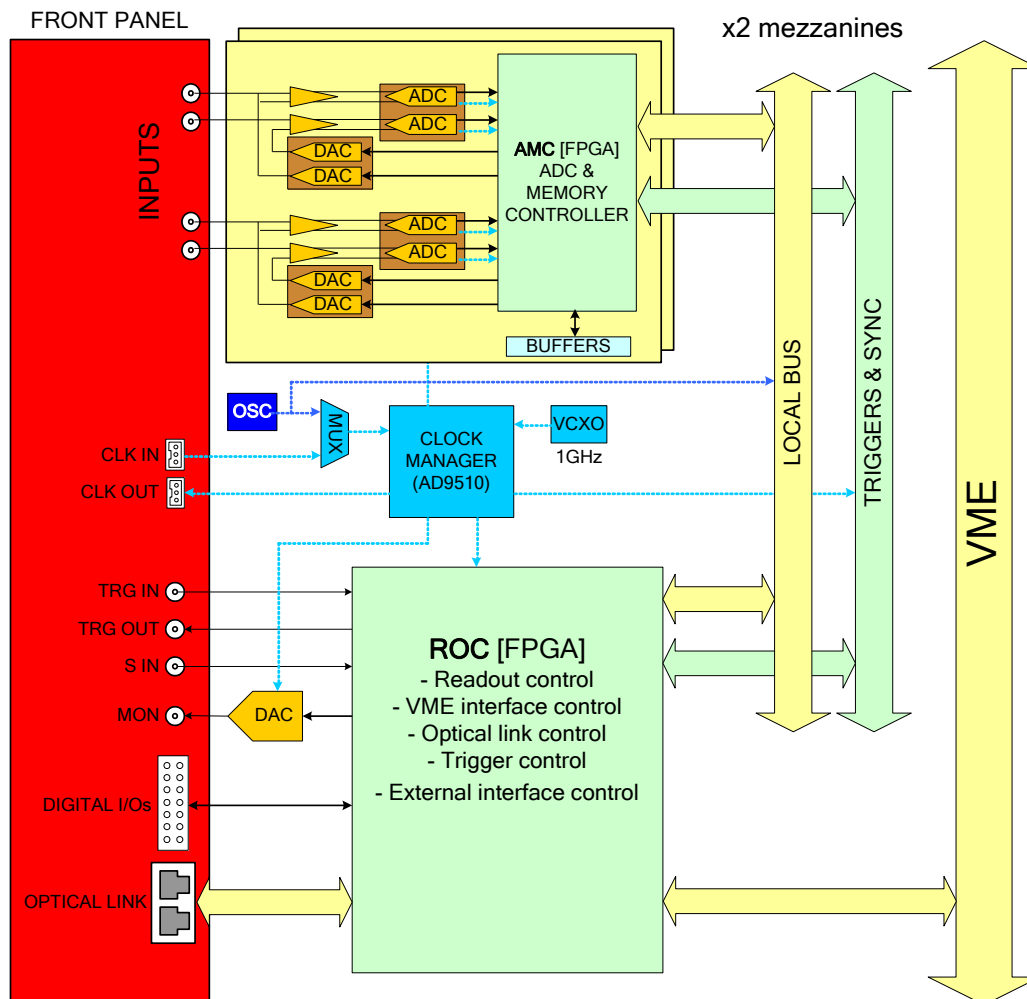

**Fig. 1.1: Mod. V1751 Block Diagram**

The function of each block will be explained in detail in the subsequent sections.

---

## 2. Technical specifications

---

### 2.1. Packaging and Compliancy

---

---

#### 2.1.1. *Supported VME Crates*

The module is housed in a 6U-high, 1U-wide VME unit. The board hosts the VME P1, and P2 connectors and fits into both VME/VME64 standard and V430 backplanes. VX1751 versions fit VME64X compliant crates.

---

### 2.2. Power requirements


---

The power requirements of the module are as follows:

**Table 2.1: Model V1751 power requirements**

+5 V	6.5A
+12 V	0.2A
-12 V	0.3A

## 2.3. Front Panel

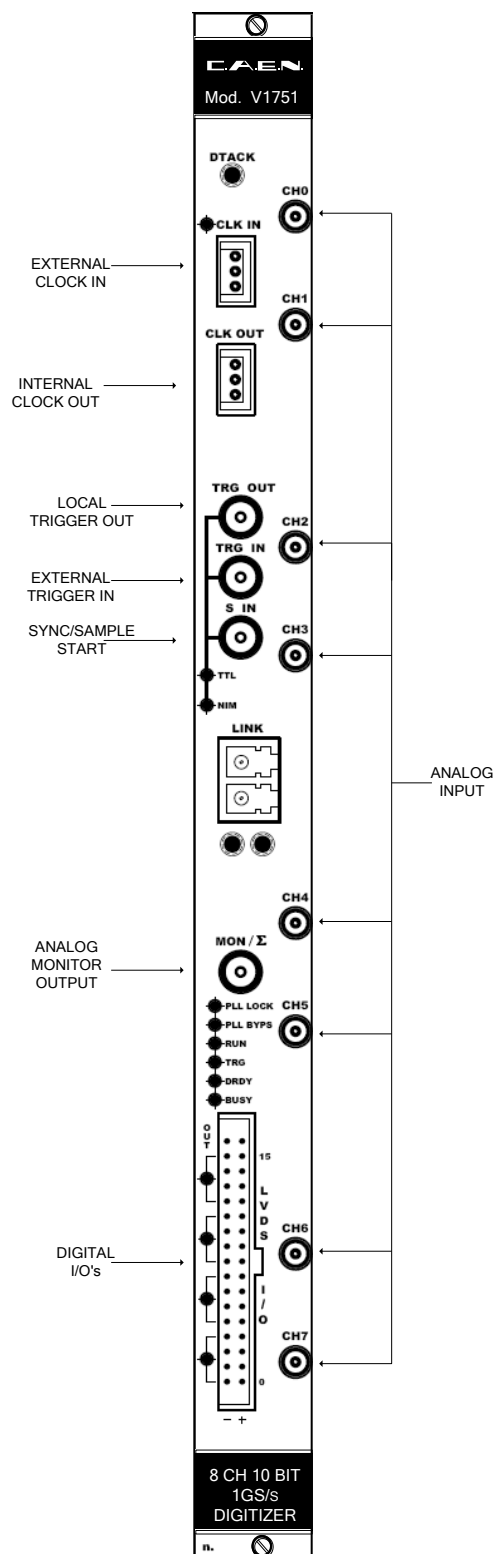

**Fig. 2.1: Mod. V1751 front panel**

## 2.4. External connectors

### 2.4.1. ANALOG INPUT connectors



**Fig. 2.2: MCX connector**

**Single ended version** (see options in § 1.1):

*Function:*


Analog input, single ended, input dynamics: 1Vpp  $Z_{in}=50\Omega$

*Mechanical specifications:*

MCX connector (CS 85MCX-50-0-16 SUHNER)

When Dual Edge Sampling mode is used, make sure that the EVEN channels are disconnected

Absolute max analog input voltage: 3Vpp (with  $V_{rail}$  max +3V or -3V) for any DAC offset in single ended configuration



**Fig. 2.3: AMP Differential connector**

**Differential version** (see options in § 1.1):

*Function:*

Analog input, differential, input dynamics: 1Vpp  $Z_{in}=100\Omega$

*Mechanical specifications:*

AMP 3-102203-4 AMP MODUII

Absolute max analog input voltage: T.B.D.

When Dual Edge Sampling mode is used, make sure that the EVEN channels are disconnected

Absolute max analog input voltage: 3Vpp (with  $V_{rail}$  max +3V or -3V) in differential configuration.

---

### 2.4.2. CONTROL connectors

*Function:*


- TRG OUT: Local trigger output (NIM/TTL, on  $R_t = 50\Omega$ )
- TRG IN: External trigger input (NIM/TTL,  $Z_{in} = 50\Omega$ )
- SYNC/SAMPLE/START: Sample front panel input (NIM/TTL,  $Z_{in} = 50\Omega$ )
- MON/ $\Sigma$ : DAC output 1Vpp on  $R_t = 50\Omega$

*Mechanical specifications:*

00-type LEMO connectors

---

### 2.4.3. ADC REFERENCE CLOCK connectors



**Fig. 2.4: AMP CLK IN/OUT Connector**

*Function:*

CLK IN: External clock/Reference input, AC coupled (diff. LVDS, ECL, PECL, LVPECL, CML),  $Z_{diff} = 100\Omega$ .

*Mechanical specifications:*

AMP 3-102203-4 connector


*Function:*

CLOCK OUT: Clock output, DC coupled (diff. LVDS),  $Z_{diff} = 100\Omega$ .

*Mechanical specifications:*

AMP 3-102203-4 connector

## 2.4.4. Digital I/O connectors

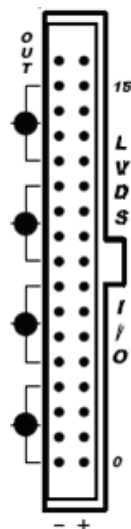


**Fig. 2.5: Programmable IN/OUT Connector**

*Function:* N.16 programmable differential LVDS I/O signals,  $Z_{diff\_in} = 100\Omega$ . Four Independent signal group 0÷3, 4÷7, 8÷11, 12÷15, In / Out direction control; see also § 3.5.

*Mechanical specifications:*  
3M-7634-5002- 34 pin Header Connector

## 2.4.5. Optical LINK connector

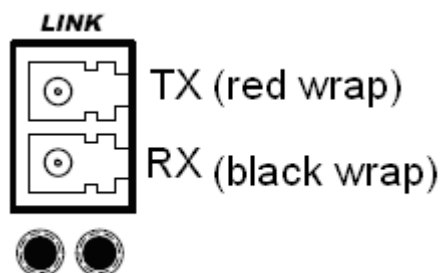

**Fig. 2.6: LC Optical Connector**

*Mechanical specifications:*

LC type connector; to be used with Multimode 62.5/125µm cable with LC connectors on both sides

*Electrical specifications:*

Optical link for data readout and slow control with transfer rate up to 80MB/s; daisy chainable.



## 2.5. Other front panel components

### 2.5.1. Displays

The front panel hosts the following LEDs:


**Table 2.2: Front panel LEDs**

Name:	Colour:	Function:
<b>DTACK</b>	green	VME read/write access to the board
<b>CLK_IN</b>	green	External clock enabled.
<b>NIM</b>	green	Standard selection for TRG OUT, TRG IN, S IN.
<b>TTL</b>	green	Standard selection for TRG OUT, TRG IN, S IN.
<b>LINK</b>	green/yellow	Network present; Data transfer activity
<b>PLL_LOCK</b>	green	The PLL is locked to the reference clock
<b>PLL_BYPS</b>	green	The reference clock drives directly ADC clocks; the PLL circuit is switched off and the PLL_LOCK LED is turned off.
<b>RUN</b>	green	RUN bit set
<b>TRG</b>	green	Triggers are accepted
<b>DRDY</b>	green	Event/data (depending on acquisition mode) are present in the Output Buffer
<b>BUSY</b>	red	All the buffers are full
<b>OUT_LVDS</b>	green	Signal group OUT direction enabled.

---

## 2.6. Internal components

- SW2,4,5,6 “Base Addr. [31:16]”:** Type: 4 rotary switches  
Function: Set the VME base address of the module.
- SW3 “CLOCK SOURCE”** Type: Dip Switch  
Function: Select clock source (External or Internal)
- SW1 “FW”** Type: Dip Switch.  
Function: it allows to select whether the “Standard” (STD) or the “Back up” (BKP) firmware must be loaded at power on; (default position: STD).

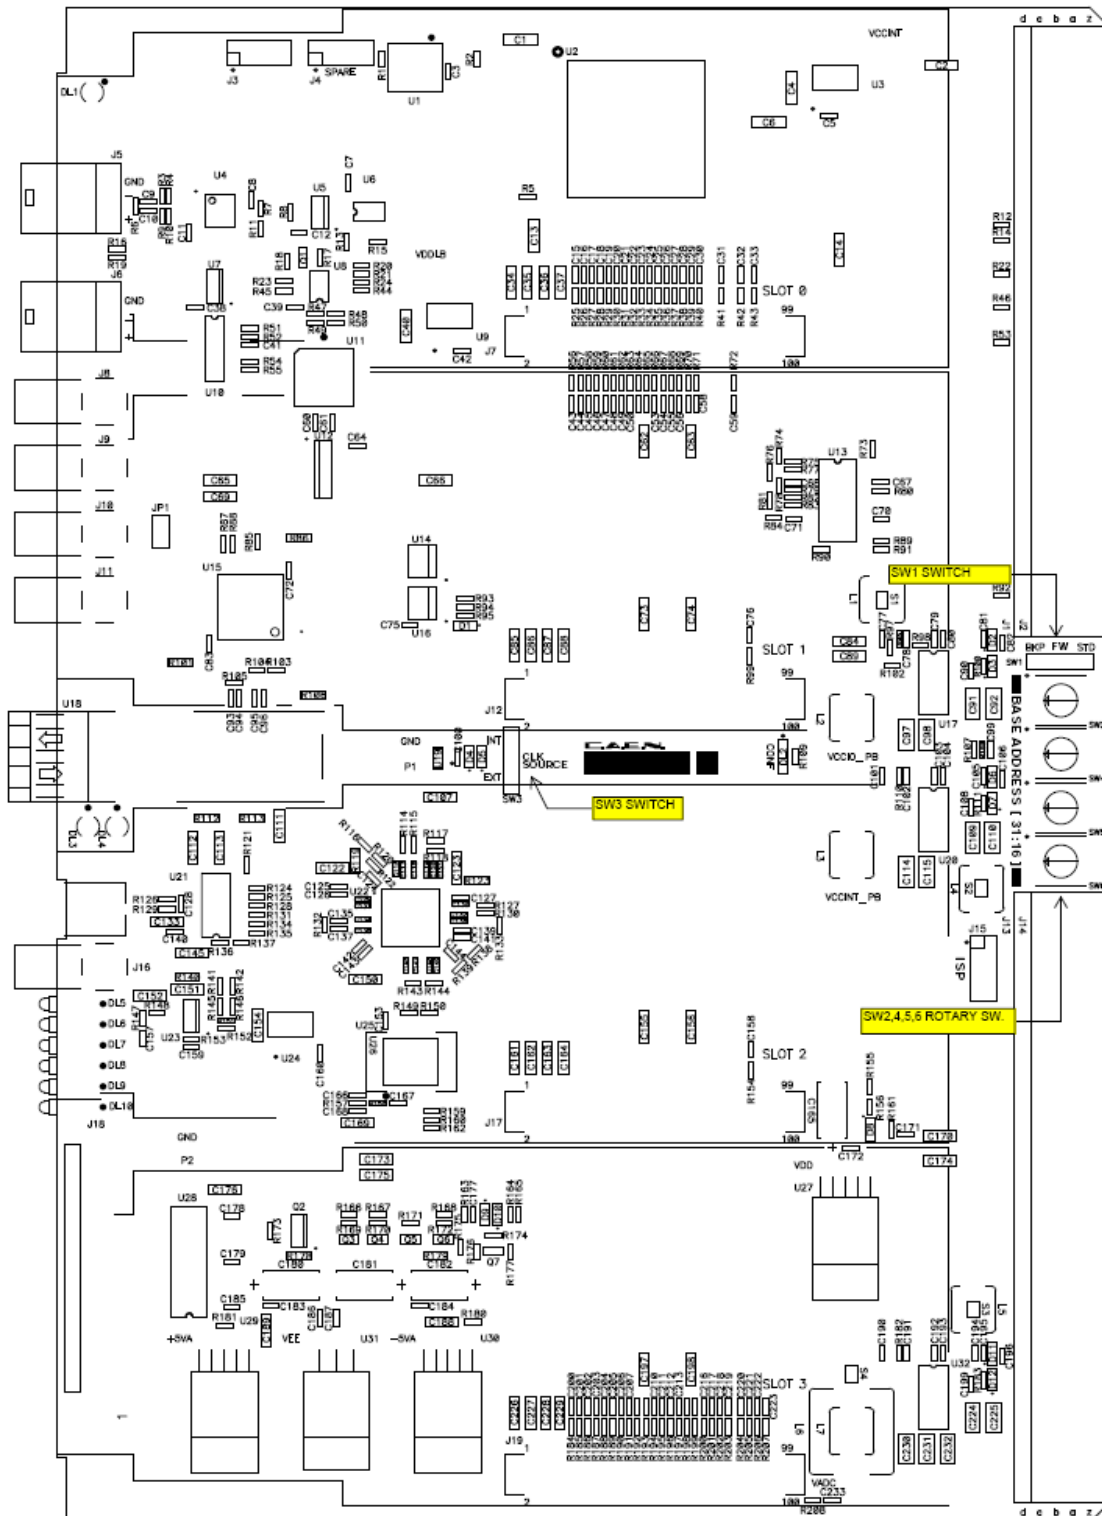

**Fig. 2.7: Rotary and dip switches location**

## 2.7. Technical specifications table

**Table 2.3: Mod. V1751 technical specifications**

<b>Package</b>	1-unit wide 6U-VME64 or 6U-VME64X module
<b>Analog Input</b>	8 channels, single-ended (SE) or differential. (4 channel in DES mode) Input range: 1Vpp; Bandwidth: 500MHz. Programmable DAC for Offset Adjust x ch. (SE only).
<b>Digital Conversion</b>	Resolution: 10 bit; Sampling rate: 1GS/s (2GS/s in DUAL EDGE SAMPLING mode) simultaneously on each channel; multi board synchronization (one board can act as clock master). External Gate Clock capability (NIM/TTL) for burst or single sampling mode.
<b>ADC Sampling Clock generation</b>	Three operating modes: - PLL mode - internal reference (50 MHz loc. oscillator). - PLL mode - external reference on CLK_IN ( $\pm 100$ ppm tolerance). - PLL Bypass mode: Ext. 1GHz clock on CLK_IN drives directly ADC clocks for 1GS/s; 2GS/s in DUAL EDGE SAMPLING mode).
<b>CLK_IN</b>	AC coupled differential input clock LVDS, ECL, PECL, LVPECL, CML (single ended NIM/TTL available using cable adapter).
<b>CLK_OUT</b>	DC coupled differential LVDS output clock, locked to ADC sampling clock. Freq.: $10 \div 500$ MHz.
<b>Memory Buffer</b>	1.835 and 14.4 MSamples/ch sizes available (become 3.6 and 28.8 MSamples/ch in Dual Edge Sampling mode); Multi Event Buffer with independent read and write access. Programmable event size and pre-post trigger. Divisible into $1 \div 1024$ buffers.
<b>Trigger</b>	Common External TRGIN (NIM or TTL) and VME Command Individual channel autotrigger (time over/under threshold)TRGOUT (NIM or TTL) for the trigger propagation to other boards.
<b>Trigger Time Stamp</b>	31-bit counter – 16ns resolution – 17s range
<b>ADC and Memory controller FPGA</b>	One FPGA Altera Cyclone EP3C16 per couple of channels (see Table 1.1)
<b>Optical Link</b>	Data readout and slow control with transfer rate up to 80 MB/s, to be used instead of VME bus. Daisy chainable: one A2818 PCI card can control and read eight boards in a chain.
<b>VME interface</b>	VME64X compliant D32, BLT32, MBLT64, CBLT32/64, 2eVME, 2eSST, Multi Cast Cycles Transfer rate: 60MB/s (MBLT64), 100MB/s (2eVME), 160MB/s (2eSST). Sequential and random access to the data of the Multi Event Buffer. The Chained readout allows to read one event from all the boards in a VME crate with a BLT access.
<b>Upgrade</b>	V1751 firmware can be upgraded via VME or Optical Link
<b>Software</b>	General purpose C and LabVIEW Libraries; Demo and software tools for Windows and Linux
<b>Analog Monitor</b>	12bit / 125 MHz DAC FPGA controlled output, four operating modes on MON/ $\Sigma$ connector: - Waveform Generator: 1 Vpp ramp generator - Majority: output signal is proportional to the number of ch. under/over threshold (1 step = 125mV) - Buffer Occupancy: output signal is proportional to the Multi Event Buffer Occupancy - Voltage level: output signal is a programmable voltage level
<b>LVDS I/O</b>	16 general purpose LVDS I/O controlled by the FPGA Busy, Data Ready, Memory full, Individual Trig-Out and other function can be programmed An Input Pattern from the LVDS I/O can be associated to each trigger as an event marker

## 3. Functional description

### 3.1. Analog Input

The module is available either with single ended (on MCX connector) or, on request, differential (on Tyco MODU II 3-pin connector) input channels.

#### 3.1.1. Single ended input

Input dynamics is 1V ( $Z_{in} = 50 \Omega$ ). 16bit DAC allow to add up to  $\pm 0.5V$  DC offset to preserve the full dynamic range also with unipolar positive or negative input signals. The input bandwidth ranges from DC to 500 MHz.

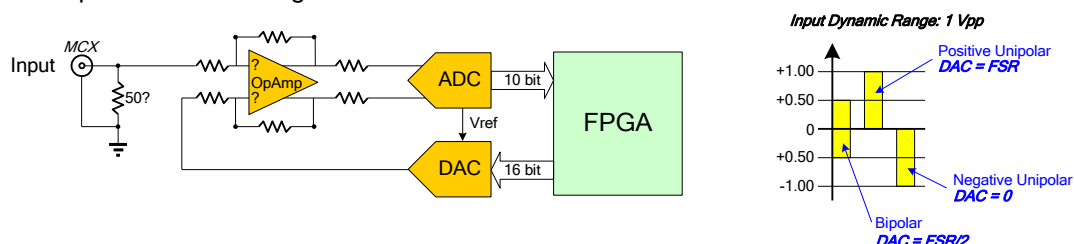


Fig. 3.1: Single ended input diagram

#### 3.1.2. Differential input

Input dynamics is 1Vpp ( $Z_{diff} = 100 \Omega$ ). The input bandwidth ranges from DC to 500 MHz.


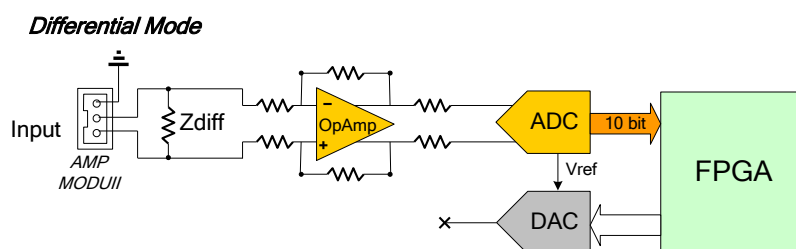


Fig. 3.2: Differential input diagram

## 3.2. Clock Distribution

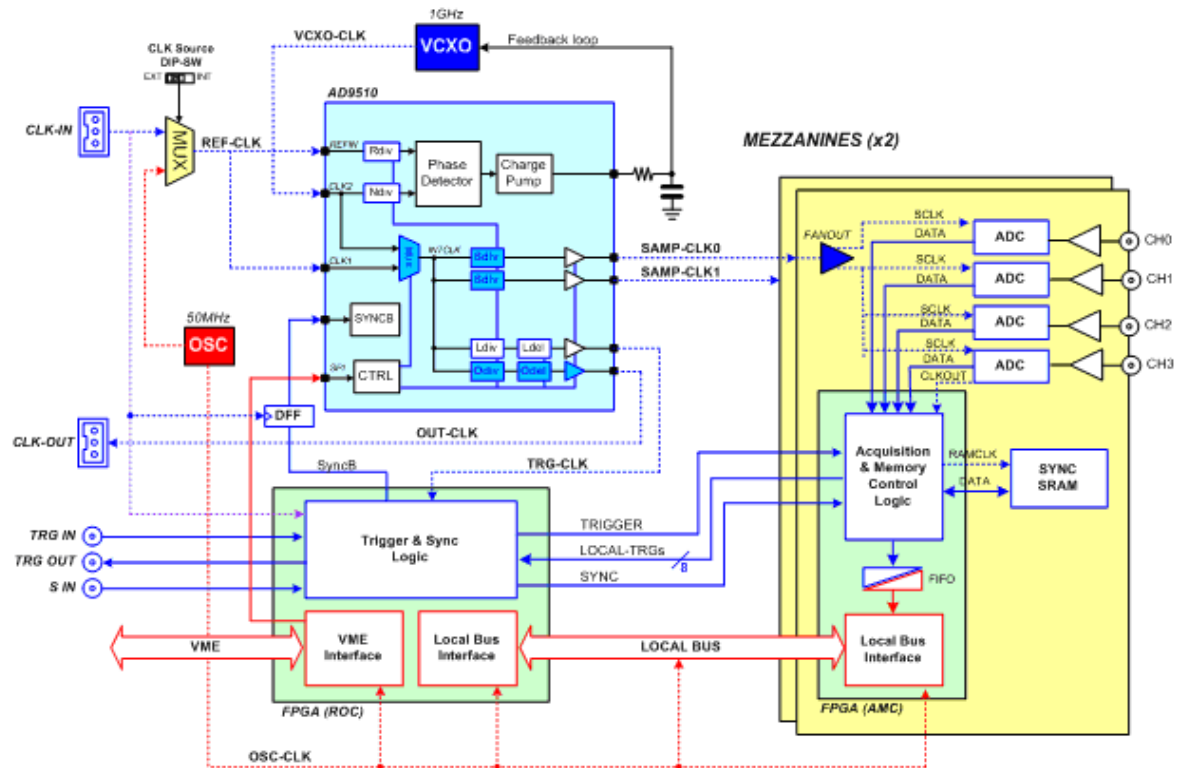

**Fig. 3.3: Clock distribution diagram**

The module clock distribution takes place on two domains: OSC-CLK and REF-CLK; the former is a fixed 50MHz clock provided by an on board oscillator, the latter provides the ADC sampling clock.

OSC-CLK handles both VME and Local Bus (communication between motherboard and mezzanine boards; see red traces in the figure above).

REF-CLK handles ADC sampling, trigger logic, acquisition logic (samples storage into RAM, buffer freezing on trigger) through a clock chain. Such domain can use either an external (via front panel signal) or an internal (via local oscillator) source (selection is performed via dip switch SW1, see § 2.6); in the latter case OSC-CLK and REF-CLK will be synchronous (the operation mode remains the same anyway).

REF-CLK is processed by AD9510 device, which delivers 6 clock out signals; 4 signals are sent to ADCs, one to the trigger logic and one to drive CLK-OUT output (refer to AD9510 data sheet for more details:

[http://www.analog.com/UploadedFiles/Data\\_Sheets/AD9510.pdf](http://www.analog.com/UploadedFiles/Data_Sheets/AD9510.pdf) );

two operating modes are foreseen: **Direct Drive Mode** and **PLL Mode**

---

### 3.2.1. *Direct Drive Mode*

The aim of this mode is to drive externally the ADCs' Sampling Clock; generally this is necessary when the required sampling frequency is not a VCXO frequency sub multiple. The only requirement over the SAMP-CLK is to remain within the ADCs' range.

---

### 3.2.2. *PLL Mode*

The AD9510 features an internal Phase Detector which allows to couple REF-CLK with VCXO (1 GHz frequency); for this purpose it is necessary that REF-CLK is a sub multiple of 1 GHz.

AD9510 default setting foresees the board internal clock (50MHz) as clock source of REF-CLK.

This configuration leads to  $N_{div} = 100$ ,  $R_{div} = 5$ , thus obtaining 10MHz at the Phase Detector input and  $CLK-INT = 1GHz$ .

The required 500 MHz Sampling Clock is obtained by processing CLK-INT through Sdiv dividers.

When an external clock source is used, if it has 50MHz frequency, then AD9510 programming is not necessary, otherwise Ndiv and Rdiv have to be modified in order to achieve PLL lock.

A REF-CLK frequency stability better than 100ppm is mandatory.

---

### 3.2.3. *Trigger Clock*

TRG-CLK signal has a frequency equal to 1/8 of SAMP-CLK; therefore a 8 samples "uncertainty" occurs over the acquisition window (16 samples uncertainty with V1751 operated at 2GS/s).

---

### 3.2.4. *Output Clock*

Front panel Clock Output is User programmable. Odiv and Odel parameters allows to obtain a signal with the desired frequency and phase shift (in order to recover cable line delay) and therefore to synchronize daisy chained boards. CLK-OUT default setting is OFF, it is necessary to enable the AD9510 output buffer to enable it.

---

### 3.2.5. *AD9510 programming*

CAEN has developed a software tool which allows to handle easily the clock parameters, the CAENupgrader; see [www.caen.it](http://www.caen.it) path: Products / Front End / VME / Controller (VME)

---

### 3.2.6. *PLL programming*

In PLL mode the User has to enter the divider for input clock frequency (**input clock PLL mode**, via CAENupgrader); since the VCXO frequency is 1GHz, in order to use, for example, a 50MHz ExtClk, the divider to be entered is 20.

Then it is necessary to set the parameters for sampling clock and CLK\_OUT (**enable**, **frequency** and **delay** in **Output Clock** field via CAENupgrader); the tool refuses wrong settings for such parameters.

---

### **3.2.7. Direct Drive *programming***

In Direct Drive/BYPASS mode, the User can directly set the input frequency (**Input Clock** field, real values are allowed). Given an input frequency, it is possible to set the parameters in order to provide the required signals.

---

### **3.2.8. Configuration file**

Once all parameters are set, the tool allows to save the configuration file which includes all the AD9510 device settings (see CAENupgrader documentation). It is also possible to browse and load into the AD9510 device a pre existing configuration file (see CAENupgrader documentation). For this purpose it is not necessary the board power cycle.

---

### **3.2.9. Multiboard *synchronization***

In cases when multi-board systems are involved in an experiment, it is necessary to synchronize different boards. In this way the user can acquire from N boards with Y channel each, like if they were just one board with (N x Y) channels.

The main issue in the synchronization of a multi-board system is to propagate the sampling clock among the boards. This is made through input/output daisy chain connections among the digitizers. One board has to be chosen to be the “master” board that propagates its own clock to the others. A programmable phase shift can adjust possible delays in the clock propagation. This allows to have both the same ADC sampling clock, and the same time reference for all boards. Having the same time reference means that the acquisition starts/stops at the same time, and that the time stamps of different boards is aligned to the same absolute time.

There are several ways to implement the trigger logic. The synchronization tool allows to propagate the trigger to all boards and acquire the events accordingly. Moreover, in case of busy state of one or more boards, the acquisition is inhibited for all boards.

For a detailed guide to multi-board synchronization, refer to the document:

*AN2086 - Synchronization of CAEN Digitizers in Multiple Board Acquisition Systems*  
(web available).



---

## 3.3. Acquisition Modes

---

### 3.3.1. Channel calibration

In order to achieve best performance, a self channel calibration procedure should be run after the ADCs have stabilized their operating temperature. Whenever the operating temperature changes significantly, a new calibration procedure should be performed. The calibration is performed through a write access to either Broadcast ADC Configuration or Channel n ADC Configuration register; in order to achieve the best performance, it is strongly suggested to calibrate the channels through the Broadcast ADC Configuration register.

#### 3.3.1.1. Normal mode self calibration

- Set to 0 the Calibration bit of Broadcast ADC Configuration register.
- Set such bit to 1. The self calibration process will start and the flag "Calibrating bit" of Channel n Status register will be set to 0.
- Polling on the flag "Calibrating bit" until it returns to 1 (few milliseconds).
- Set again to 0 the Calibration bit of Broadcast ADC Configuration register

#### 3.3.1.2. Dual Edge Sampling mode self calibration

- Make sure that the EVEN channels are disconnected
- Disable (mask) EVEN channels
- Select Dual Edge Sampling mode (bit[12] of the Channel Configuration register)
- Set to 0 the Calibration bit of Broadcast ADC Configuration register.
- Set such bit to 1. The self calibration process will start and the flag "Calibrating bit" of Channel n Status register will be set to 0.
- Polling on the flag "Calibrating bit" until it returns to 1 (few milliseconds).
- Set again to 0 the Calibration bit of Broadcast ADC Configuration register

Whenever switching from one mode (Normal or Dual Edge Sampling) to another, calibration must be repeated.

---

### 3.3.2. Acquisition run/stop

The acquisition can be started in two ways, according to bits[1:0] setting of Acquisition Control register (address 0x8100):

- setting bit[2] in the Acquisition Control register (bits[1:0] of Acquisition Control must be set to 00, that is SW CONTROLLED Start/Stop Mode, or to 01, that is S-IN CONTROLLED Start/Stop Mode).
- driving S-IN signal high (bits[1:0] of Acquisition Control must be set to 01)

Therefore acquisition is stopped either:

- resetting the bit[2] in the Acquisition Control register (bits[1:0] of Acquisition Control must be set to 00, that is SW CONTROLLED Start/Stop Mode, or to 01, that is S-IN CONTROLLED Start/Stop Mode).
- driving S-IN signal low (bits[1:0] of Acquisition Control must be set to 01).

### 3.3.3. Acquisition Triggering: Samples and Events

When the acquisition is running, a trigger signal allows to:

- store the 31-bit counter value of the Trigger Time Tag (TTT).

The counter (representing a time reference), like so the Trigger Logic Unit (see § 3.2) operates at a frequency of 125 MHz (i.e. 8ns, that is to say 8 ADC clock cycles, or 16 with DES mode). Due to the way the acquired data are written into the board internal memory (i.e. 4-sample bunches), the TTT counter is read every 2 trigger logic clock cycles, which means the trigger times stamp resolution results in 16 ns (i.e. 62.5 MHz). Basing on that, the LSB of the TTT is always “0”.

- increment the EVENT COUNTER;
- fill the active buffer with the pre/post-trigger samples, whose number is programmable (Acquisition window width), freezing then the buffer for readout purposes, while acquisition continues on another buffer. Buffer size is programmable through the Buffer Organization (0x800C) register

**Table 3.1: Buffer Organization (case of 1.835Msample/ch memory)**


REGISTER	BUFFER NUMBER	SIZE of one BUFFER (samples)	
		SRAM @ 1 GS/s	SRAM @ 2 GS/s
0x00	1	1.75M	3.5M
0x01	2	896k	1.75M
0x02	4	448k	896k
0x03	8	224k	448k
0x04	16	112k	224k
0x05	32	56k	112k
0x06	64	28k	56k
0x07	128	14k	28k
0x08	256	7k	14k
0x09	512	3584	7k
0x0A	1024	1792	3584

An event is therefore composed by the trigger time tag, pre- and post-trigger samples and the event counter.

Overlap between “acquisition windows” may occur (a new trigger occurs while the board is still storing the samples related to the previous trigger); this overlap can be either rejected or accepted (programmable via VME).

If the board is programmed to accept the overlapped triggers, as the “overlapping” trigger arrives, the current active buffer is filled up, then the samples storage continues on the subsequent one.

In this case events will not have all the same size (see Fig. 3.4).

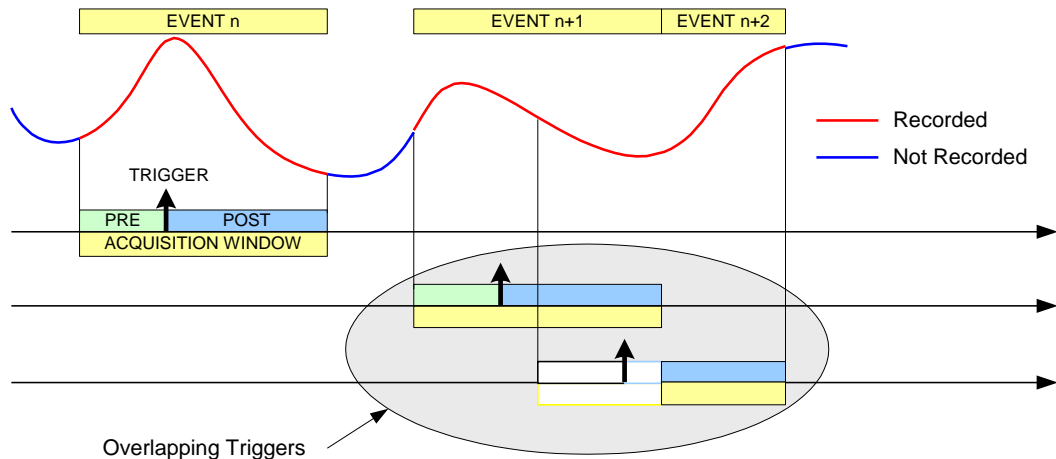

**Fig. 3.4: Trigger Overlap**

A trigger can be refused for the following causes:

- acquisition is not active
- memory is FULL and therefore there are no available buffers
- the required number of samples for building the pre-trigger of the event is not reached yet; this happens typically as the trigger occurs too early either with respect to the RUN\_ACQUISITION command (see § 3.3.1) or with respect to a buffer emptying after a MEMORY\_FULL status
- the trigger overlaps the previous one and the board is not enabled for accepting overlapped triggers

As a trigger is refused, the current buffer is not frozen and the acquisition continues writing on it. The Event Counter can be programmed in order to be either incremented or not. If this function is enabled, the Event Counter value identifies the number of the triggers sent (but the event number sequence is lost); if the function is not enabled, the Event Counter value coincides with the sequence of buffers saved and readout.

### 3.3.3.1. Custom size events

It is possible to make events with a number of Memory locations, which depends on Buffer Organization register setting smaller than the default value. One memory location contains 7 ADC samples and the maximum number of memory locations  $N_{LOC}$  is  $NS = 256K/Nblocks$  and  $NS = 2M/Nblocks$ , for 1.835 MSamples/ch and 14.4 MSamples/ch version respectively.

Smaller  $N_{LOC}$  values can be achieved by writing the number of locations  $N_{LOC}$  into the Custom Size register.

$N_{LOC} = 0$  means “default size events”, i.e. the number of memory locations is the maximum allowed.

$N_{LOC} = N1$  means that one event will be made of  $7*N1$  or  $14*N1$  (DES mode).

---

### **3.3.4. Event structure**

An event is structured as follows:

- Header (four 32-bit words)
- Data (variable size)

The event can be readout either via VME or Optical Link; data format is 32 bit long word.

#### **3.3.4.1. Header**

It is composed by four words, namely:


- Size of the event (number of 32 bit long words)
- Board ID (GEO); Bit24; data format: 0; 16 bit pattern, latched on the LVDS I/O as one trigger arrives; Channel Mask (=1: channels participating to event; ex CH5 and CH7 participating → Ch Mask: 0xA0, this information must be used by the software to acknowledge which channel the samples are coming from)
- Event Counter: It is the trigger counter; it can count either accepted triggers only, or all triggers.
- Trigger Time Tag: It is a 31-bit counter (31 bit count + 1 bit as roll over flag), which is reset either as acquisition starts or via front panel Reset signal, and is incremented every 8 ADC clock cycles (or 16 if in DES mode).  
TTT resolution is 16 ns and ranges up to 17 s (i.e.  $8 \text{ ns} \cdot (2^{31} - 1)$ ).

#### **3.3.4.2. Samples**

Stored samples; data from masked channels are not read. When operating V1751 at 2 GS/s, "EVEN" channels are automatically disabled. Bit [31,30] are useful to acknowledge how many samples are in the last word of an event (1 to 3); example in § 3.3.4.3. shows a case with two samples in the last word.

### 3.3.4.3. Event format example

The event format is shown in the following figure (case of 8 channels enabled):

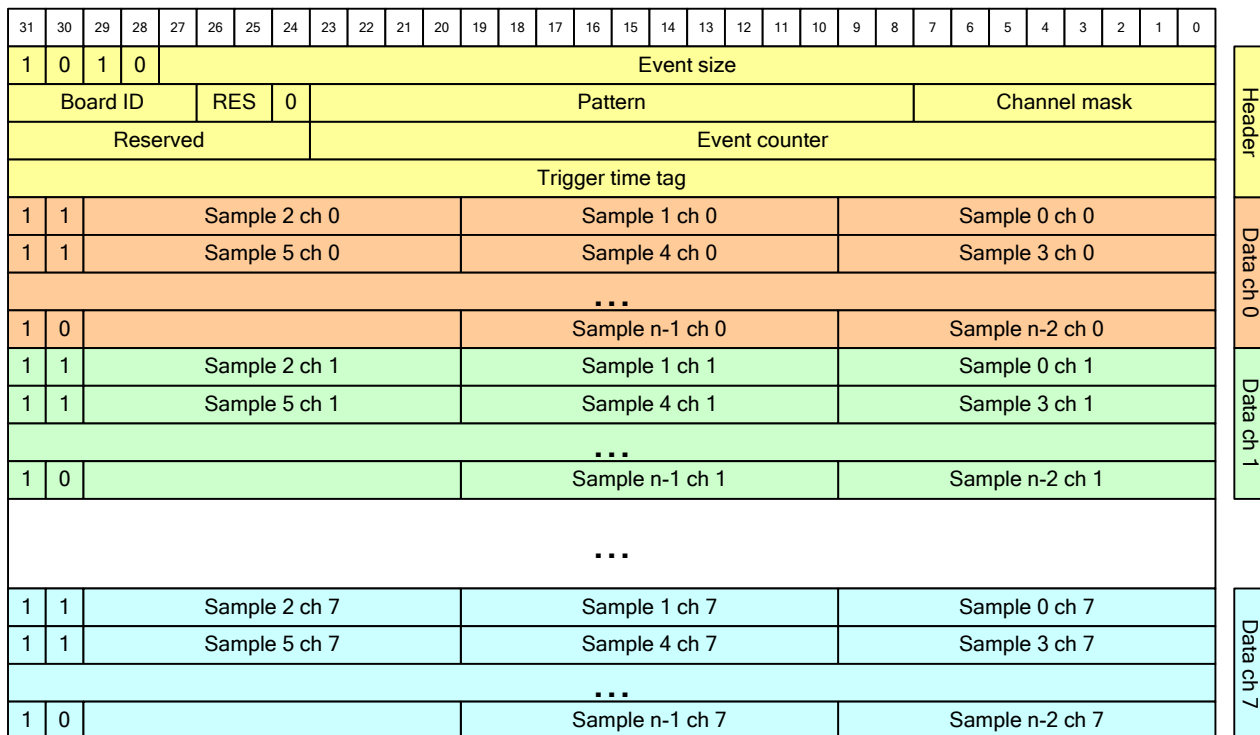

**Fig. 3.5: Event Organization**

---

### 3.3.5. Acquisition Synchronization

Each channel of the digitizer is provided with a SRAM memory that can be organized in a programmable number  $N$  of circular buffers ( $N = [1:1024]$ , see Table 3.1). When the trigger occurs, the FPGA writes further a programmable number of samples for the post-trigger and freezes the buffer, so that the stored data can be read via VME or Optical Link. The acquisition can continue without dead-time in a new buffer.

When all buffers are filled, the board is considered FULL: no trigger is accepted and the acquisition stops (i.e. the samples coming from the ADC are not written into the memory, so they are lost). As soon as one buffer is readout and becomes free, the board exits the FULL condition and acquisition restarts.

**IMPORTANT NOTICE:** When the acquisition restarts, no trigger is accepted until at least the entire buffer is written. This means that the dead time is extended for a certain time (depending on the size of the acquisition window) after the board exits the FULL condition.

A way to eliminate this extra dead time is by setting  $\text{bit}[5] = 1$  in the Acquisition Control register. The board is so programmed to enter the FULL condition when  $N-1$  buffers are filled: no trigger is then accepted, but samples writing continues in the last available buffer. As soon as one buffer is readout and becomes free, the boards exits the FULL condition and can immediately accept a new trigger. This way, the FULL reflects the BUSY condition of the board (i.e. inability to accept triggers); if required, the BUSY signal can be provided out on the digitizer front panel through the TRG-OUT LEMO connector (bits[19:18] and bits[17:16] of Front Panel I/O Control register, address 0x811C) or the LVDS I/Os (see § 3.5).

**NOTE:** when  $\text{bit}[5] = 1$ , the minimum number of circular buffers to be programmed is  $N = 2$ .

In some cases, the BUSY propagation from the digitizer to other parts of the system has some latency and it can happen that one or more triggers occur while the digitizer is already FULL and unable to accept those triggers. This condition causes event loss and it is particularly unsuitable when there are multiple digitizers running synchronously, because the triggers accepted by one board and not by other boards cause event misalignment.

In this cases, it is possible to program the BUSY signal to be asserted when the digitizer is close to FULL condition, but it has still some free buffers (Almost FULL condition). In this mode, the digitizer remains able to accept some more triggers even after the BUSY assertion and the system can tolerate a delay in the inhibit of the trigger generation. When the Almost FULL condition is enabled by setting the Almost FULL level (Memory Almost FULL Level register, address 0x816C) to  $X$ , the BUSY signal is asserted as soon as  $X$  buffers are filled, although the board still goes FULL (and rejects triggers) when the number of filled buffers is  $N$  or  $N-1$ , depending on  $\text{bit}[5]$  in the Acquisition Control Register as described above.

In case of multi-board set-up, the BUSY signal can be propagated among boards through the front panel LVDS I/O connectors (see § 3.5).

---

### **3.3.6.      *Temperature monitor and power down***

#### **3.3.6.1.      ADC chips temperature readout**

The V1751 provide a ADC core temperature monitoring feature, useful in order to estimate the steady thermal state and to perform the calibration procedure (see § 3.3.1). Each ADC houses two channels (0-1, 2-3. 4-5, 6-7) so such registers provide identical temperature values in pairs; such values can be readout in the Channel n Temperature Monitor register.

#### **3.3.6.2.      ADC chips over temperature protection**


The V1751 provide an ADC thermal protection feature. Each ADC will be automatically powered off whenever the core temperature reaches 90°C. The relevant channels will not therefore participate any more to data event, and the OverTemp and PowerDown bits of Channel n Status register will set to 1.

When the ADC core temperature decreases under 65°C, the Over temperature flag of Channel n Status register will return to 0, and the relevant channels can be restored to normal operation following these steps:

- Wait until Over temperature flag (bit 8 of Channel n Status) register returns to 0
- Set to 0 Power Down configuration (bit[0] of Channel n ADC Configuration)
  - Power Down flag (bit[7] of Channel n Status register) will return to 0.
- Perform a calibration procedure on the restored channels (see § 3.3.1)
- Perform a channel synchronization

## 3.4. Trigger management

All the channels in a board share the same trigger: this means that all the channels store an event at the same time and in the same way (same number of samples and same position with respect to the trigger); several trigger sources are available.

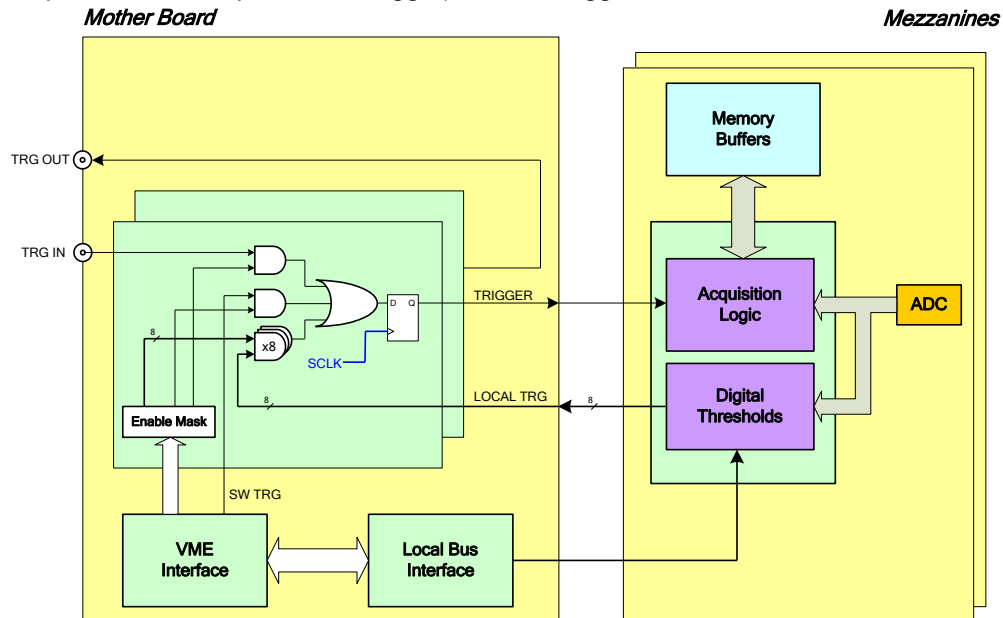

**Fig. 3.6: Block diagram of Trigger management**

### 3.4.1. External trigger

External trigger can be NIM/TTL signal on LEMO front panel connector, 50 Ohm impedance. The external trigger is synchronized with the internal clock (see § 3.2); if External trigger is not synchronized with the internal clock, a one clock period jitter occurs.

### 3.4.2. Software trigger


Software trigger are generated via VME bus (write access in the relevant register).



### 3.4.3. Local channel auto-trigger

Each channel can generate a local trigger as the digitized signal exceeds the  $V_{th}$  threshold (ramping up or down, depending on Channel Configuration register settings). The  $V_{th}$  digital threshold, the edge type are programmable via VME register accesses.

**NOTE:** the local trigger signal does not start directly the event acquisition on the relevant channel; such signal is propagated to the central logic which produces the global trigger, which is distributed to all channels (see § 3.4.4).

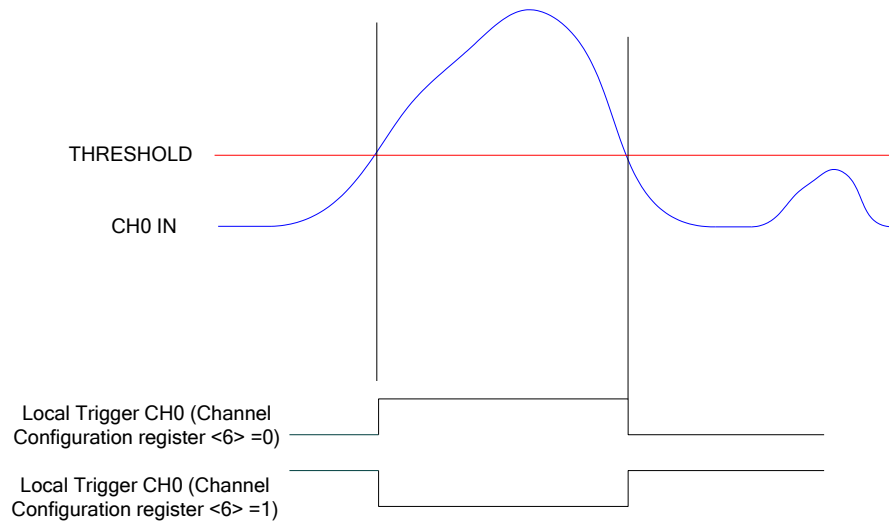

**Fig. 3.7: Local trigger generation**

### 3.4.3.1. Trigger coincidence level

In the standard operating, the board's acquisition trigger is a global trigger generated as in § 3.4.4 This global trigger allows the coincidence acquisition mode to be performed through the Majority operation. Enabling the coincidences is possible by writing in the Trigger Source enable Mask register (address 0x810C):


- Bits[7:0] enable the specific channel to participate to the coincidence;
- Bits[23:20] set the coincidence window ( $T_{TVAW}$ );
- Bits[26:24] set the Majority (i.e. Coincidence) level; the coincidence takes place when:

Number of enabled local auto-triggers > Majority level

Supposing bits[7:0] = FF (i.e. all channels are enabled) and bits[26:24] = 01 (i.e. Majority level = 1), a global trigger is issued whenever at least two of the enabled local channel auto-triggers are in coincidence within the programmed  $T_{TVAW}$ .


The Majority level must be smaller than the number of channels enabled via bits[7:0] mask. By default, bits[26:24] = 00 (i.e. Majority level = 0), which means the coincidence acquisition mode is disabled and the  $T_{TVAW}$  is meaningless. In this case, the global trigger is simple OR of the enabled local channel auto-triggers.

Fig. 3.8 shows the trigger management in case the coincidences are disabled.

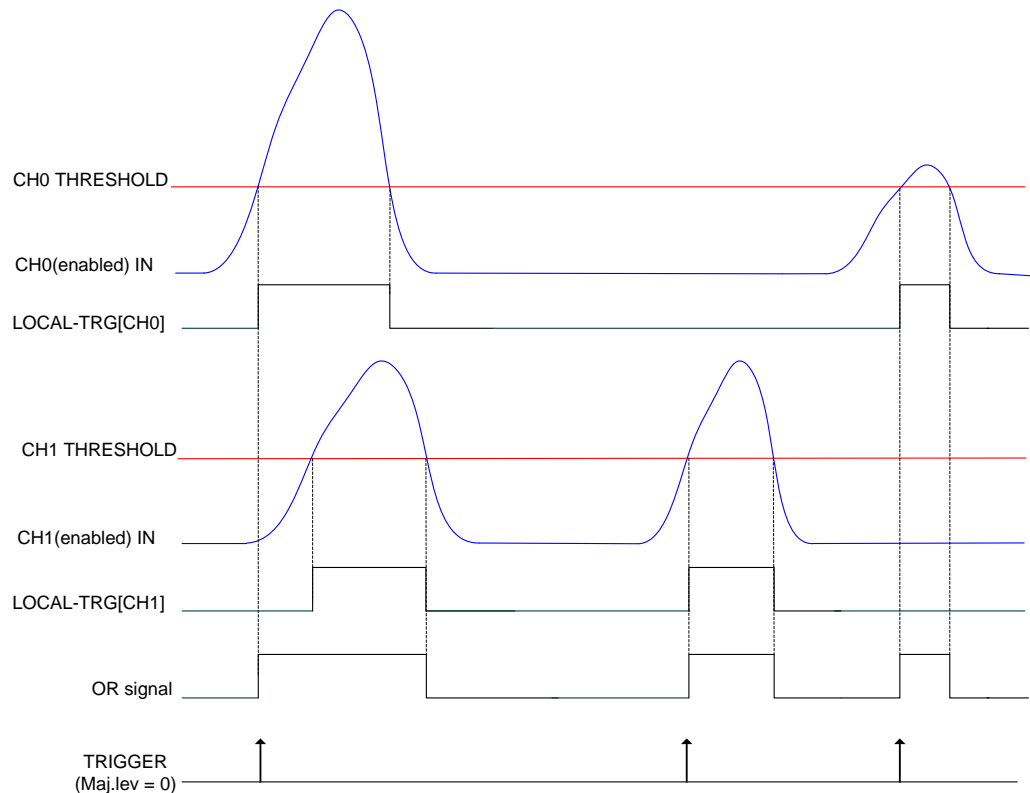

**Fig. 3.8: Local trigger relationship with Majority level = 0**


Fig. 3.9 and shows the trigger management in case the coincidences are enabled with Majority level = 1 and  $T_{TVAW}$  is a value different from 0.

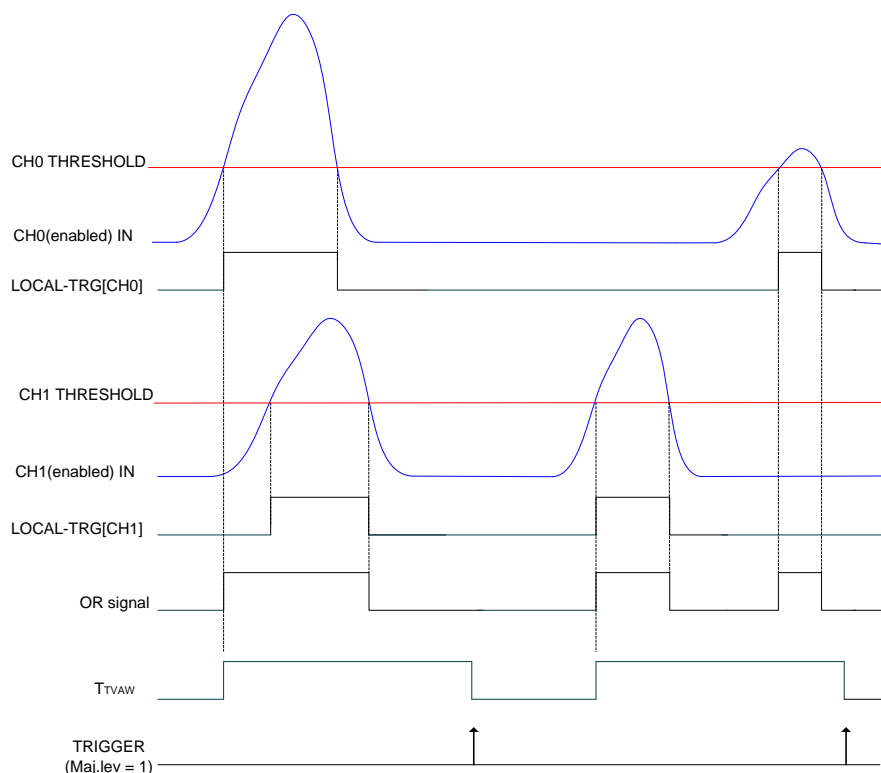

**Fig. 3.9: Local trigger relationship with Majority level = 1 and  $T_{TVAW} \neq 0$**

**NOTE:** with respect to the position where the global trigger is generated, the portion of input signal stored depends on the programmed length of the acquisition window and on the post trigger setting.

Fig. 3.10 shows the trigger management in case the coincidences are enabled with Majority level = 1 and  $T_{TVAW} = 0$  (i.e. 1 clock cycle)

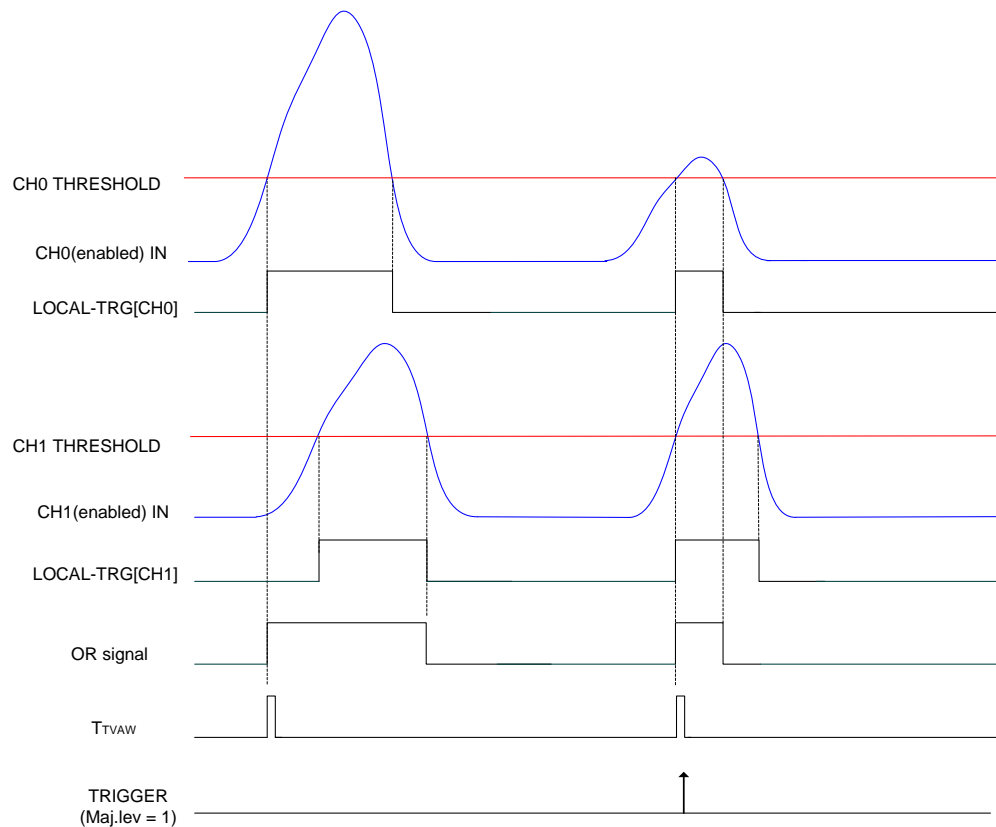

**Fig. 3.10: Local trigger relationship with Majority level = 1 and  $T_{TVAW} = 0$**

In this case, the global trigger is issued if at least two of the enabled local channel auto-triggers are in coincidence within 1 clock cycle.

**NOTE:** a practical example of making coincidences with the digitizer in the standard operating is detailed in the document:

*GD2817 - How to make coincidences with CAEN digitizers (web available).*

### 3.4.4. Trigger distribution

The OR of all the enabled trigger sources, after being synchronized with the internal clock, becomes the global trigger of the board and is fed in parallel to all the channels, which store an event.

A Trigger Out is also generated on the relevant front panel TRG\_OUT connector (NIM or TTL), and allows to extend the trigger signal to other boards.

For example, in order to start the acquisition on all the channels in the crate, as one of the channels ramps over threshold, the Local Trigger must be enabled as Trigger Out, the Trigger Out must then be fed to a Fan Out unit; the obtained signal has to be fed to the External Trigger Input of all the boards in the crate (including the board which generated the Trigger Out signal).

### 3.5. Front Panel I/Os

The V1751 is provided with 16 general purpose programmable LVDS I/O signals (see § 2.4.4). From the ROC FPGA firmware revision 3.8 on, a more flexible configuration management has been introduced, which allows these signals to be programmed in terms of direction (INPUT/OUTPUT) and functionality by groups of 4.

**IN ORDER TO KEEP THE COMPATIBILITY WITH FIRMWARE REVISIONS LOWER THAN 3.8, ALL PREVIOUS CONFIGURATIONS ARE STILL AVAILABLE IN THE FIRMWARE (SEE § 3.5.4). SINCE THIS COULD BE NO LONGER GUARANTEED IN THE FUTURE, THE USER IS HEARTLY RECOMMENDED TO TAKE THE NEW CONFIGURATION MANAGEMENT AS REFERENCE.**

The direction of the signals are set by the bits[5:2] in the Front Panel I/O Control register (address 0x811C):

Bit[2] → LVDS I/O[3:0]  
 Bit[3] → LVDS I/O[7:4]  
 Bit[4] → LVDS I/O[11:8]  
 Bit[5] → LVDS I/O[15:12]

Where setting the bit to 0 enables the relevant signals in the group as INPUT, while 1 enables them as OUTPUT.

The LVDS I/O new modes are enabled by setting to 1 the bit[8] of the Front Panel I/O Control register (address 0x811C).

By default, the new modes are disabled (i.e. bit[8] = 0) and the status of the LVDS I/O signals is congruent with the old Programmed I/O mode:

**Table 3.2: Front Panel LVDS I/Os default setting**

Nr.	Direction	Description
0	out	Ch 0 Trigger Request
1	out	Ch 1 Trigger Request
2	out	Ch 2 Trigger Request
3	out	Ch 3 Trigger Request
4	out	Ch 4 Trigger Request
5	out	Ch 5 Trigger Request
6	out	Ch 6 Trigger Request
7	out	Ch 7 Trigger Request
8	out	Memory Full
9	out	Event Data Ready
10	out	Channels Trigger
11	out	RUN Status
12	in	Trigger Time Tag Reset (active low)
13	in	Memory Clear (active low)
14	-	reserved
15	-	reserved

When enabled (i.e. bit[8] = 1), the new management allows each group of 4 signals of the LVDS I/O 16-pin connector to be configured in one of the 4 following modes (according to bits[15:0] in the Front Panel LVDS I/O New Features register; address 0x81A0):

- Mode 0 (bits[n+3:n] = 0000): REGISTER
- Mode 1 (bits[n+3:n] = 0001): TRIGGER
- Mode 2 (bits[n+3:n] = 0010): nBUSY/nVETO
- Mode 3 (bits[n+3:n] = 0011): OLD STYLE

Where n = 0, 4, 8, 12

**NOTE:** Whatever option is set, the LVDS I/Os are always latched with the trigger and the relevant status of the 16 signals is always written into the header's Pattern field (see § 3.3.4.1) the user can then choose to readout it or not.

**Table 3.3: Features description when LVDS group is configured as INPUT**

	REGISTER	TRIGGER	nBUSY/nVETO	OLD STYLE
<b>LVDS IN [15:12]</b>	Reg[15:12]	<i>Not available</i>	15: nRunIn 14: nTriggerIn 13: nVetoIn 12: nBusyIn	15: <i>reserved</i> 14: <i>reserved</i> 13: <i>reserved</i> 12: nClear_TTT
<b>LVDS IN [11:8]</b>	Reg[11:8]	<i>Not available</i>	11: nRunIn 10: nTriggerIn 9: nVetoIn 8: nBusyIn	11: <i>reserved</i> 10: <i>reserved</i> 9: <i>reserved</i> 8: nClear_TTT
<b>LVDS IN [7:4]</b>	Reg[7:4]	<i>Not available</i>	7: nRunIn 6: nTriggerIn 5: nVetoIn 4: nBusyIn	7: <i>reserved</i> 6: <i>reserved</i> 5: <i>reserved</i> 4: nClear_TTT
<b>LVDS IN [3:0]</b>	Reg[3:0]	<i>Not available</i>	3: nRunIn 2: nTriggerIn 1: nVetoIn 0: nBusyIn	3: <i>reserved</i> 2: <i>reserved</i> 1: <i>reserved</i> 0: nClear_TTT

**Table 3.4: Features description when LVDS group is configured as OUTPUT**

	REGISTER	TRIGGER	nBUSY/nVETO	OLD STYLE
<b>LVDS OUT [15:12]</b>	Reg[15:12]	TrigOut_Ch[7:4]	3: nRun 2: nTrigger 1: nVeto 0: nBusy	15: Run 14: Trigger 13: DataReady 12: Busy
<b>LVDS OUT [11:8]</b>	Reg[11:8]	TrigOut_Ch[3:0]	7: nRun 6: nTrigger 5: nVeto 4: nBusy	11: Run 10: Trigger 9: DataReady 8: Busy
<b>LVDS OUT [7:4]</b>	Reg[7:4]	TrigOut_Ch[7:4]	11: nRun 10: nTrigger 9: nVeto 8: nBusy	7: Run 6: Trigger 5: DataReady 4: Busy
<b>LVDS OUT [3:0]</b>	Reg[3:0]	TrigOut_Ch[3:0]	15: nRun 14: nTrigger 13: nVeto 12: nBusy	3: Run 2: Trigger 1: DataReady 0: Busy

---

### 3.5.1. **Mode 0: REGISTER**

Direction is INPUT: the logic level of the LVDS I/O signals can be read through the Front Panel I/O Data register, address 0x8118.

Direction is OUTPUT: the logic level of the LVDS I/O signals can be written through the Front Panel I/O Data register, address 0x8118

---

### 3.5.2. **Mode 1: TRIGGER**

Direction is INPUT: *Not available.*

Direction is OUTPUT: the TrgOut\_Ch[(n+3):n] signals (n = 0, 4) consist of the local channel triggers coming directly from the mezzanines.

---

### 3.5.3. **Mode 2: nBUSY/nVETO**

#### 3.5.3.1. **nBusy signal**

nBusyIn (INPUT) is an active low signal which, if enabled, is used to generate the nBusy signal (OUTPUT) as below.

The **Busy** signal (fed out on LVDS I/Os or TRG-OUT LEMO connector) is:

**Almost\_Full OR (LVDS\_BusyIn AND BusyIn\_enable)**

where

- Almost\_Full indicates the filling of the Buffer Memory up to a programmable level (12-bit range) set in the Memory Buffer Almost Full Level register, address 0x816C;
- LVDS\_BusyIn is available in nBUSY/nVETO configuration (see Table 3.3);
- BusyIn\_enable is set in the Acquisition Control register, address 0x8100, bit[8].

#### 3.5.3.2. **nVETO signal**

Direction is INPUT: nVETOIn is an active low signal which, if enabled (i.e. Acquisition Control register, address 0x8100, bit[9] = 1), is used to veto the generation of the global trigger propagated to the channels for the event acquisition.

Direction is OUTPUT: the nVETO signal is the copy of nVETOIn.

#### 3.5.3.3. **nTrigger signal**

Direction is INPUT: nTriggerIn is an active low signal which, if enabled, is a real trigger able to cause the event acquisition. It can be propagated to TRG-OUT LEMO connector or to the individual triggers.

Direction is OUTPUT: nTrigger signal is the copy of the trigger signal propagated to the TRG-OUT LEMO connector.

#### 3.5.3.4. nRun signal

Direction is INPUT: nRunIn is an active low signal which can be used as Start for the digitizer (i.e. Acquisition Control register, address 0x8100, bits[1:0] = 11). It is possible to program the start on the level or on the edge of the nRunIn signal (Acquisition Control register, bit[11]).

Direction is OUTPUT: nRun signal is the inverse of the internal Run of the board.

---

#### 3.5.4. Mode 3: OLD STYLE

Old Style mode has been introduced in order the LVDS connector (properly programmed) to be able to feature the same I/O signals available in the ROC FPGA firmware revisions lower than 3.8.

**NOTE:** for old configuration registers description, please refer to the document *V1751 Registers Description* as indicated in the file text file *V1751 User Manual Release Notes* downloadable at the V1751 and VX1751 web pages.

##### 3.5.4.1. nClear\_TTT signal

It is the only signal available as INPUT. It is the Trigger Time Tag (TTT) reset, like in the old configuration.

##### 3.5.4.2. Busy signal

The Busy signal is active high and it is exactly the inverse of the nBusy signal (see § 3.5.4.2).

In case the Memory Buffer Almost Full Level register is set to 0x0 and the BusyIn signal is disabled, the Busy is the FULL signal present in the old configuration.

##### 3.5.4.3. DataReady signal

The DataReady is an active high signal indicating that the board has data available for readout (the same as the DataReady front panel LED does).

##### 3.5.4.4. Trigger signal

The active high Trigger signal is the copy of the acquisition trigger (global trigger) sent from the motherboard to the mezzanines (it is neither the signal provided out on the TRG-OUT LEMO connector nor the inverse of the signal sent to the LVDS connector; see § 3.5.3.3).

##### 3.5.4.5. Run signal

The Run signal is active high and represents the inverse of the nRun signal (see § 3.5.3.4).



## 3.6. Analog Monitor

The board houses a 12bit (125MHz) DAC with 0÷1 V dynamics on a 50 Ohm load (see Fig. 1.1), whose input is controlled by the ROC FPGA and the signal output (driving 50 Ohm) is available on the MON/ $\Sigma$  output connector. MON output of more boards can be summed by an external Linear Fan In. This output is delivered by a 12 bit DAC.


The DAC control logic implements four operating modes:

- Trigger Majority Mode ( Monitor Mode = 0)
- Test Mode (Monitor Mode = 1)
- Buffer Occupancy Mode (Monitor Mode = 3)
- Voltage Level Mode (Monitor Mode = 4)

Operating mode is selected via Monitor Mode register; Monitor Mode = 2 is reserved for future implementation.

### 3.6.1. Trigger Majority Mode (Monitor Mode = 0)

It is possible to generate a Majority signal with the DAC: a voltage signal whose amplitude is proportional to the number of channels under/over threshold (1 step = 125mV); this allows, via an external discriminator, to produce a global trigger signal, as the number of triggering channels has exceeded a particular threshold.

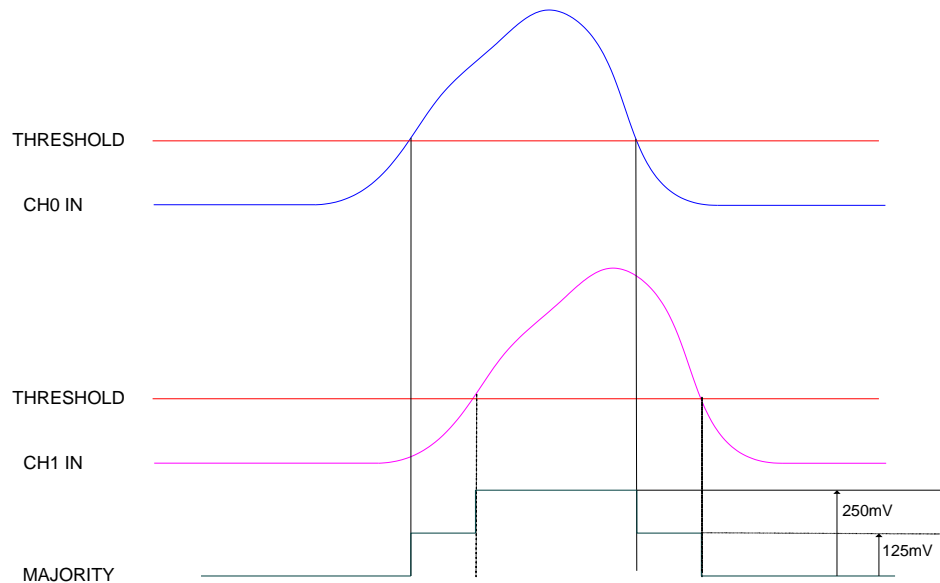

**Fig. 3.11: Majority logic (2 channels over threshold; bit[6] of Ch. Config. Register =0)**

In this mode the MON output provides a signal whose amplitude is proportional to the number of channels over the trigger threshold. The amplitude step (= +1 channel over threshold) is 125mV.

---

### **3.6.2.      *Test Mode (Monitor Mode = 1)***

In this mode the MON output provides a sawtooth signal with 1 V amplitude and 30.518 Hz frequency.

---

### **3.6.3.      *Buffer Occupancy Mode (Monitor Mode = 3)***

In this mode, MON out provides a voltage value proportional to the number of buffers filled with events; step: 1 buffer = 0.976 mV.

This mode allows to test the readout efficiency: in fact if the average event readout throughput is as fast as trigger rate, then MON out value remains constant; otherwise if MON out value grows in time, this means that readout rate is slower than trigger rate.


---

### **3.6.4.      *Voltage Level Mode (Monitor Mode = 4)***

In this mode, MON out provides a voltage value programmable via the 'N' parameter written in the SET MONITOR DAC register, with:  $V_{mon} = 1/4096 \cdot N$  (Volt).

### 3.7. Test pattern generator

The FPGA AMC can emulate the ADC and write into memory a sawtooth signal for test purposes. It can be enabled via Channel Configuration register, Fig. 3.12 shows the test ramps for even and odd channels respectively.

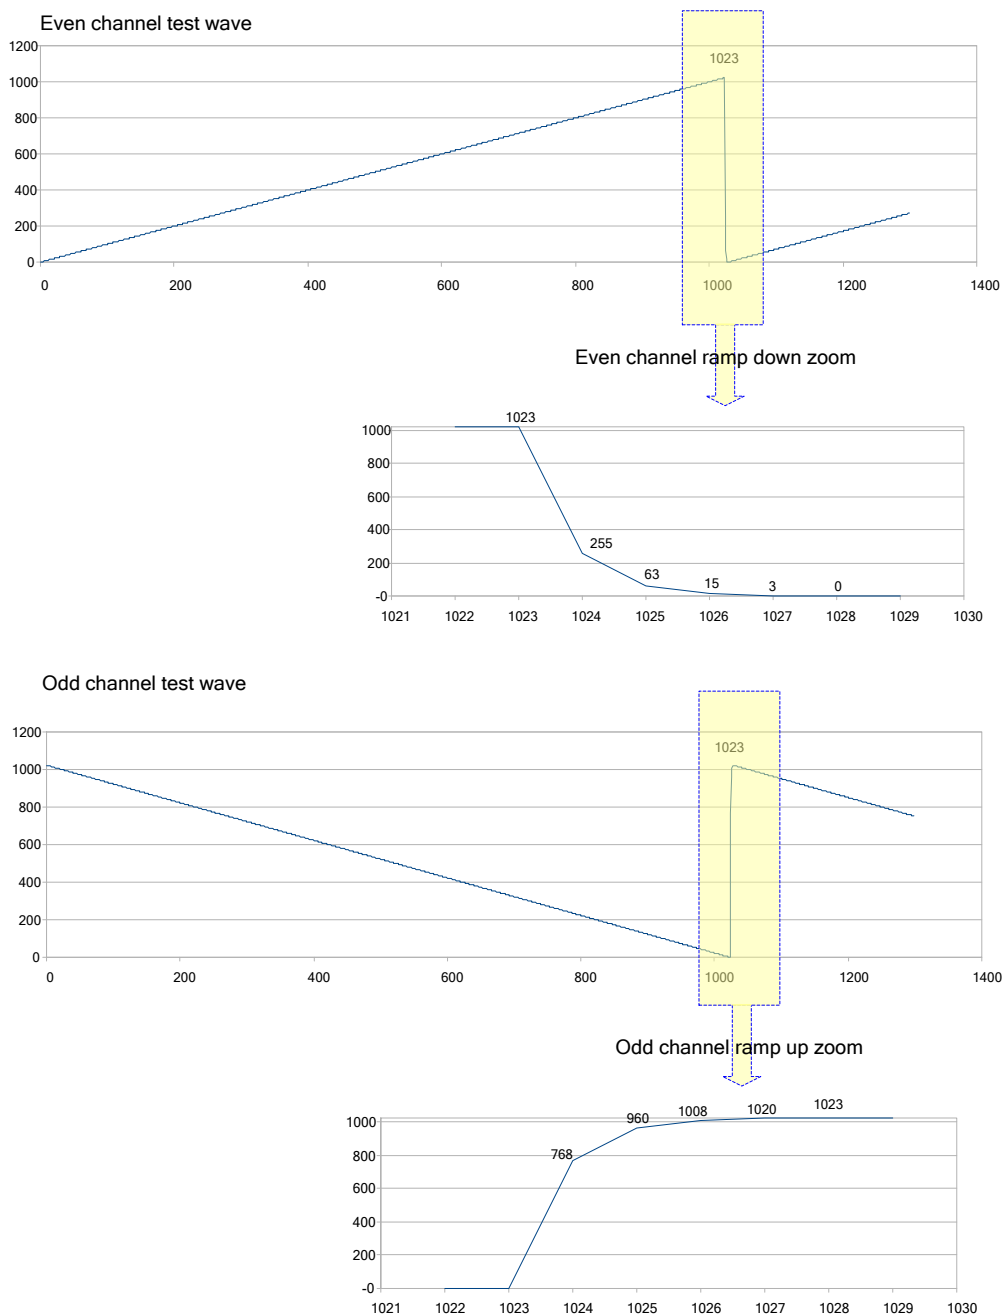

**Fig. 3.12: FPGA test waveform**

---

## 3.8. Reset, Clear and Default Configuration

---

### 3.8.1. *Global Reset*

Global Reset is performed:

- at Power ON of the module
- via a VME RESET (SYSRES)
- Software reset

It allows to clear the data off the Output Buffer, the event counter and performs a FPGAs global reset, which restores the FPGAs to the default configuration. It initializes all counters to their initial state and clears all detected error conditions.

---

### 3.8.2. *Memory Reset*

The Memory Reset clears the data off the Output Buffer.

The Memory Reset can be forwarded via either a write access to Software Clear register or with a pulse sent to the front panel Memory Clear input (see § 3.5).

---

### 3.8.3. *Timer Reset*

The Timer Reset allows to initialize the timer which allows to tag an event. The Timer Reset can be forwarded with a pulse sent to Trigger Time Tag Reset input (see § 3.5).

## 3.9. VMEbus interface


The module is provided with a fully compliant VME64/VME64X interface (see § 1.1), whose main features are:

- EUROCARD 9U Format
- J1/P1 and J2/P2 with either 160 pins (5 rows) or 96 (3 rows) connectors
- A24, A32 and CR-CSR address modes
- D32, BLT/MBLT, 2eVME, 2eSST data modes
- MCST write capability
- CBLT data transfers
- RORA/ROAK interrupter
- Configuration ROM


### 3.9.1. Addressing capabilities

#### 3.9.1.1. Base address

The module works in A24/A32 mode. The Base Address of the module can be fixed through four rotary switches (see § 2.6) and is written into a word of 24 or 32 bit. The Base Address can be selected in the range:

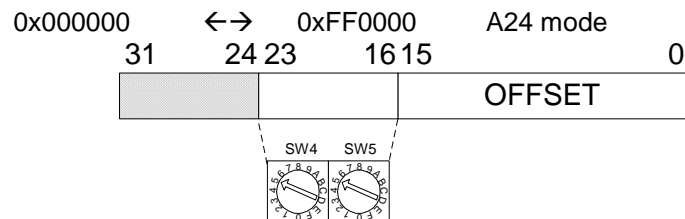

**Fig. 3.13: A24 addressing**

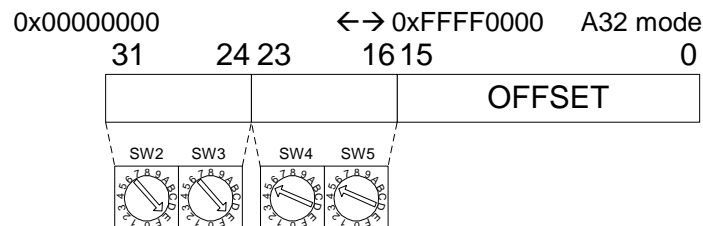


**Fig. 3.14: A32 addressing**

The Base Address of the module is selected through four rotary switches (see § 2.6), then it is validated only with either a Power ON cycle or a System Reset (see § 3.8).

#### 3.9.1.2. CR/CSR address


GEO address is picked up from relevant backplane lines and written onto bit 23..19 of CR/CSR space, indicating the slot number in the crate; the recognized Address Modifier for this cycle is 2F. *This feature is implemented only on versions with 160pin connectors.*



**Fig. 3.15: CR/CSR addressing**

### 3.9.1.3. Address relocation

Relocation Address register allows to set via software the board Base Address (valid values  $\neq 0$ ). Such register allows to overwrite the rotary switches settings; its setting is enabled via VME Control register. The used addresses are:

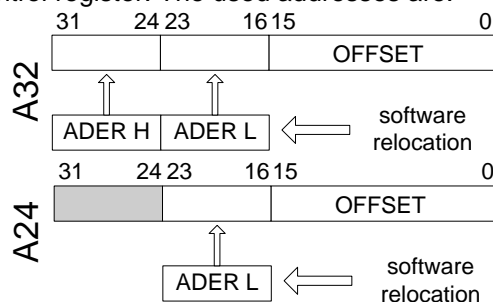

**Fig. 3.16: Software relocation of base address**

---

## 3.10. Data transfer capabilities

The board supports D32 single data readout, Block Transfer BLT32 and MBLT64, 2eVME and 2eSST cycles. Sustained readout rate is up to 60 MB/s with MBLT64, up to 100 MB/s with 2eVME and up to 160 MB/s with 2eSST.

---

## 3.11. Events readout

---

### 3.11.1. *Sequential readout*

The events, once written in the SRAMs (Memory Event Buffers), become available for readout via VME. During the memory readout, the board can continue to store more events (independently from the readout) on the free buffers. The acquisition process is therefore “deadtimeless”, until the memory becomes full.

Although the memories are SRAMs, VMEBus does not handle directly the addresses, but takes them from a FIFO. Therefore, data are read from the memories sequentially, according to the selected Readout Logic, from a memory space mapped on 4Kbytes (0x0000÷0x0FFC).

The events are readout sequentially and completely, starting from the Header of the first available event, followed by the Trigger Time Tag, the Event Counter and all the samples of the channels (from 0 to 7). Once an event is completed, the relevant memory buffer becomes free and ready to be written again (old data are lost). After the last word in an event, the first word (Header) of the subsequent event is readout. It is not possible to readout an event partially (see also § 3.3.4).

#### 3.11.1.1. **SINGLE D32**

This mode allows to readout a word per time, from the header (actually 4 words) of the first available event, followed by all the words until the end of the event, then the second event is transferred. The exact sequence of the transferred words is shown in § 3.3.4.

We suggest, after the 1<sup>st</sup> word is transferred, to check the Event Size information and then do as many D32 cycles as necessary (actually Event Size -1) in order to read completely the event.

### 3.11.1.2. BLOCK TRANSFER D32/D64, 2eVME


BLT32 allows, via a single channel access, to read N events in sequence, N is set via the BLT Event Number register.

The event size depends on the Buffer Size Register setting; namely:

$$[\text{Event Size}] = [8 * (\text{Block Size})] + [16 \text{ bytes}]$$

Then it is necessary to perform as many cycles as required in order to readout the programmed number of events.

We suggest to enable BERR signal during BLT32 cycles, in order to end the cycle avoiding filler readout. The last BLT32 cycle will not be completed, it will be ended by BERR after the #N event in memory is transferred (see example in the figure below).

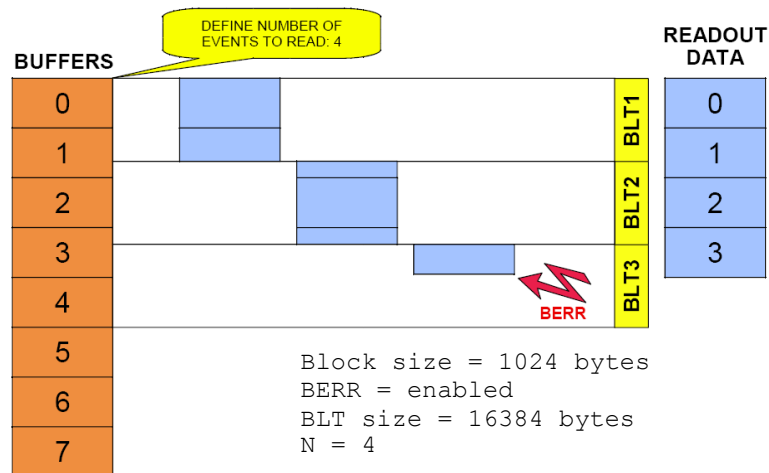

**Fig. 3.17: Example of BLT readout**

Since some 64 bit CPU's cut off the last 32 bit word of a transferred block, if the number of words composing such block is odd, it is necessary to add a dummy word (which has then to be removed via software) in order to avoid data loss. This can be achieved by setting the ALIGN64 bit in the VME Control register.

MBLT64 cycle is similar to the BLT32 cycle, except that the address and data lines are multiplexed to form 64 bit address and data buses.

The 2eVME allows to achieve higher transfer rates thanks to the requirement of only two edges of the two control signals (DS and DTACK) to complete a data cycle.



### 3.11.1.3. CHAINED BLOCK TRANSFER D32/D64

The V1751 allows to readout events from more daisy chained boards (Chained Block Transfer mode).

The technique which handles the CBLT is based on the passing of a token between the boards; it is necessary to verify that the used VME crate supports such cycles.

Several contiguous boards, in order to be daisy chained, must be configured as "first", "intermediate" or "last" via MCST Base Address and Control register. A common Base Address is then defined via the same register; when a BLT cycle is executed at the address  $CBLT\_Base + 0x0000 \div 0x0FFC$ , the "first" board starts to transfer its data, driving DTACK properly; once the transfer is completed, the token is passed to the second board via the IACKIN-IACKOUT lines of the crate, and so on until the "last" board, which completes the data transfer and asserts BERR (which has to be enabled): the Master then ends the cycle and the slave boards are rearmed for a new acquisition.

If the size of the BLT cycle is smaller than the events size, the board which has the token waits for another BLT cycle to begin (from the point where the previous cycle has ended).

### 3.11.2. Random readout (to be implemented)

Events can be readout partially (not necessarily starting from the first available) and are not erased from the memories, unless a command is performed. In order to perform the random readout it is necessary to execute an **Event Block Request** via VME.

Indicating the event to be read (page number = 12 bit datum), the offset of the first word to be read inside the event (12 bit datum) and the number of words to be read (size = 10 bit datum). At this point the data space can be read, starting from the header (which reports the required size, not the actual one, of the event), the Trigger Time Tag, the Event Counter and the part of the event required on the channel addressed in the Event Block Request.

After data readout, in order to perform a new random readout, it is necessary a new Event Block Request, otherwise Bus Error is signaled. In order to empty the buffers, it is necessary a write access to the Buffer Free register: the datum written is the number of buffers in sequence to be emptied.

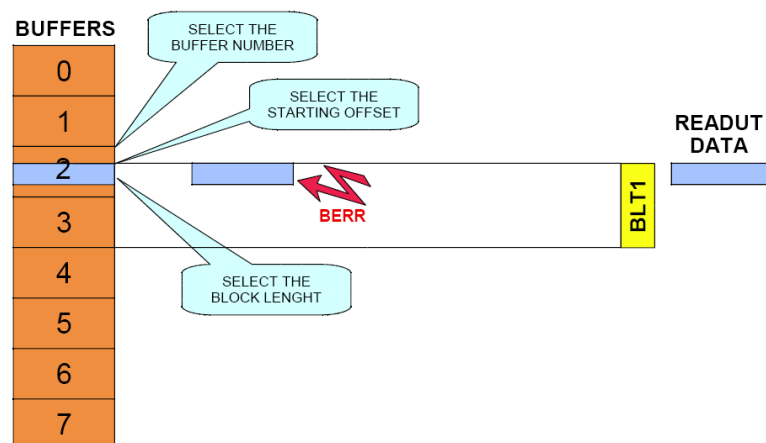


Fig. 3.18: Example of random readout

---


## 3.12. Optical Link

The board houses a daisy chainable Optical Link (communication path which uses optical fiber cables as physical transmission line) able to transfer data at 80 MB/s, therefore it is possible to connect up to eight V1751 to a single Optical Link Controller: for more information, see [www.caen.it](http://www.caen.it) (path: Products / Front End / PCI/PCIe / Optical Controller). The parameters for read/write accesses via optical link are the same used by VME cycles (Address Modifier, Base Address, data Width, etc); wrong parameter settings cause Bus Error.

VME Control Register bit 3 allows to enable the module to broadcast an interrupt request on the Optical Link; the enabled Optical Link Controllers propagate the interrupt on the PCI bus as a request from the Optical Link is sensed.

VME and Optical Link accesses take place on independent paths and are handled by board internal controller, with VME having higher priority; anyway it is better to avoid accessing the board via VME and Optical Link simultaneously.

## 4. Software tools

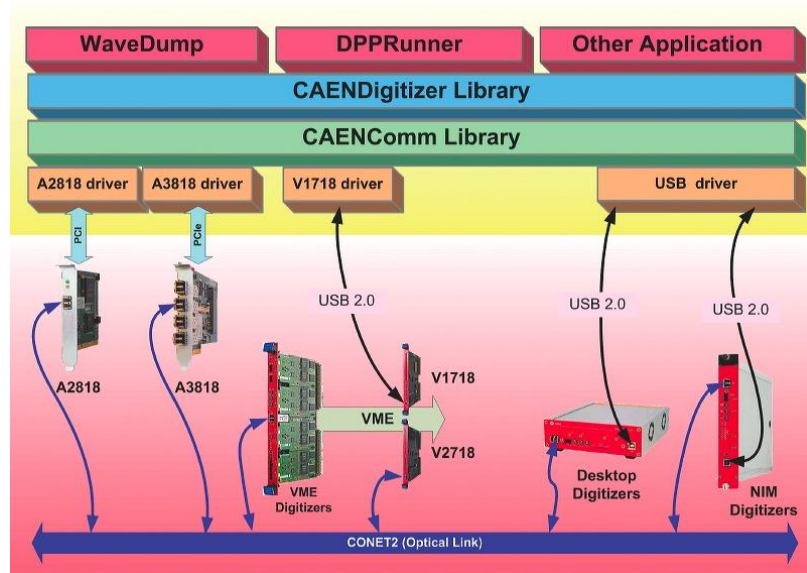

**Fig. 4.1: Block diagram of the software layers**

CAEN provides drivers for both the physical communication channels (the proprietary CONET Optical Link managed by the A2818 PCI card or A3818 PCIe cards and the VME bus accessed by the V1718 and V2718 bridges; refer to the related User Manuals), a set of C and LabView libraries, demo applications and utilities. Windows and Linux are both supported. The available software is the following:

- **CAENComm** library contains the basic functions for access to hardware; the aim of this library is to provide a unique interface to the higher layers regardless the type of physical communication channel. Note: for VME access, CAENcomm is based on CAEN's VME bridges V1718 (USB to VME) and V2718 (PCI/PCIe to VME). In the case of third-part bridges or SBCs, the user must provide the functions contained in the CAENcomm library for the relevant platform. The CAENComm requires the CAENVMELib library to be installed even in the cases where the VME is not used.
- **CAENDigitizer** is a library of functions designed specifically for the digitizer family and it supports also the boards running special DPP (Digital Pulse Processing) firmware. The purpose of this library is to allow the user to open the digitizer, program it and manage the data acquisition in an easy way: with few lines of code the user can make a simple readout program without the necessity to know the details of the registers and the event data format. The CAENDigitizer library implements a common interface to the higher software layers, masking the details of the physical channel and its protocol, thus making the libraries and applications that rely on the CAENDigitizer independent from the physical layer. The library is based on the CAENComm library that manages the communication at low level (read and write access). CAENVMELib and CAENComm libraries must be already installed on the host PC before installing the CAENDigitizer; however, both CAENVMELib and CAENComm libraries are completely transparent to the user.

- **WaveDump** is a Console application that allows to program the digitizer (according to a text configuration file that contains a list of parameters and instructions), to start the acquisition, read the data, display the readout and trigger rate, apply some post processing (such as FFT and amplitude histogram), save data to a file and also plot the waveforms using the external plotting tool “gnuplot”, available on internet for free. This program is quite basic and has no graphics but it is an excellent example of C code that demonstrates the use of libraries and methods for an efficient readout and data analysis. **NOTE:** WaveDump does not work with digitizers running DPP firmware. The users who intend to write the software on their own are suggested to start with this demo and modify it according to their needs. For more details please see the WaveDump User Manual and Quick Start Guide (Doc nr.: UM2091, GD2084).

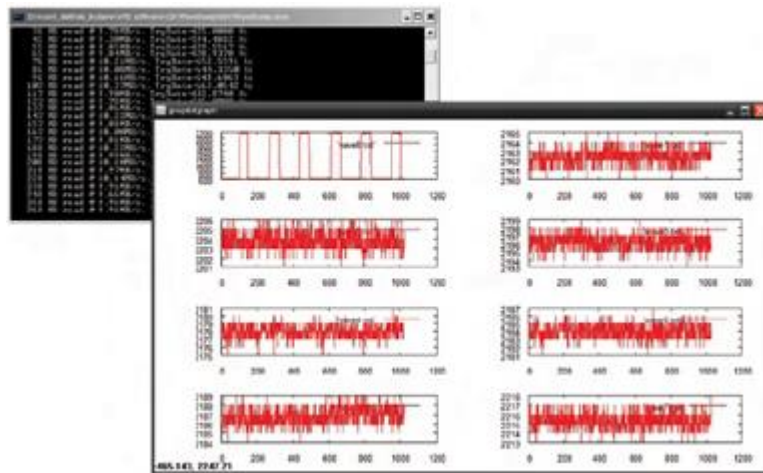


Fig. 4.2: WaveDump output waveforms

- **CAENScope** is a fully graphical program that implements a simple oscilloscope: it allows to see the waveforms, set the trigger thresholds, change the scales of time and amplitude, perform simple mathematical operations between the channels, save data to file and other operations. CAENScope is provided as an executable file; the source codes are not distributed. **NOTE:** CAENScope does not work with digitizers running DPP firmware and it is not compliant with x742 digitizer family. For more details please see the CAENScope Quick Start Guide GD2484.

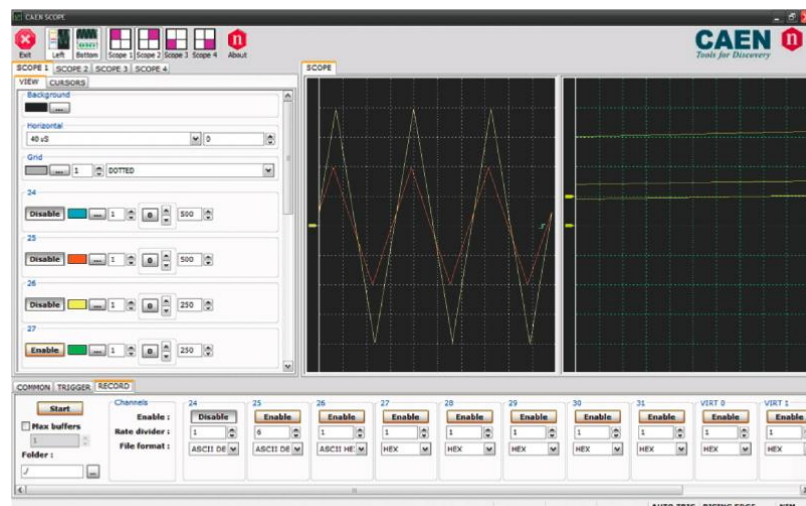


Fig. 4.3: CAENScope oscilloscope tab

- **CAENUpgrader** is a software composed of command line tools together with a Java Graphical User Interface (for Windows and Linux OS). CAENUpgrader allows in few easy steps to upload different firmware versions on CAEN boards, to upgrade the VME digitizers PLL, to get board information and to manage the firmware license. CAENUpgrader requires the installation of 2 CAEN libraries (CAENComm, CAENVMELib) and Java SE6 (or later). CAENComm allows CAENUpgrader to access target boards via USB or via CAEN proprietary CONET optical link.

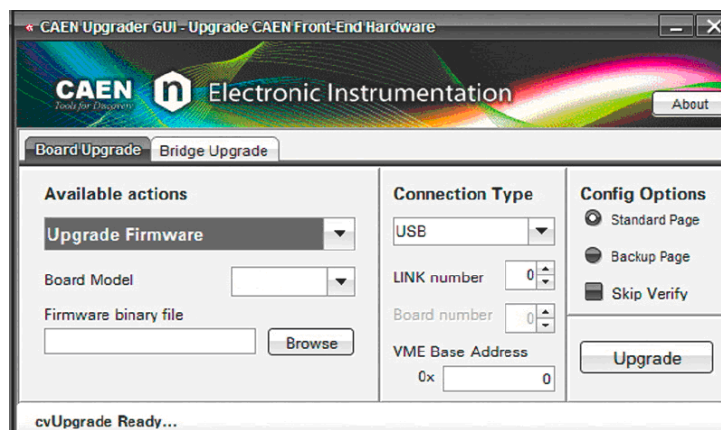


Fig. 4.4: CAENUpgrader Graphical User Interface

- **DPP Control Software** is an application that manages the acquisition in the digitizers which have DPP firmware installed on it. The program is made of different parts: there is a GUI whose purpose is to set all the parameters for the DPP and for the acquisition; the GUI generates a textual configuration file that contains all the parameters. This file is read by the Acquisition Engine (**DPPrunner**), which is a C console application that programs the digitizer according to the parameters, starts the acquisition and manage the data readout. The data, that can be waveforms, time stamps, energies or other quantities of interest, can be saved to output files or plotted using gnuplot as an external plotting tool, exactly like in WaveDump. **NOTE:** so far DPP Control Software is developed for 724, 720 and 751 digitizer series.

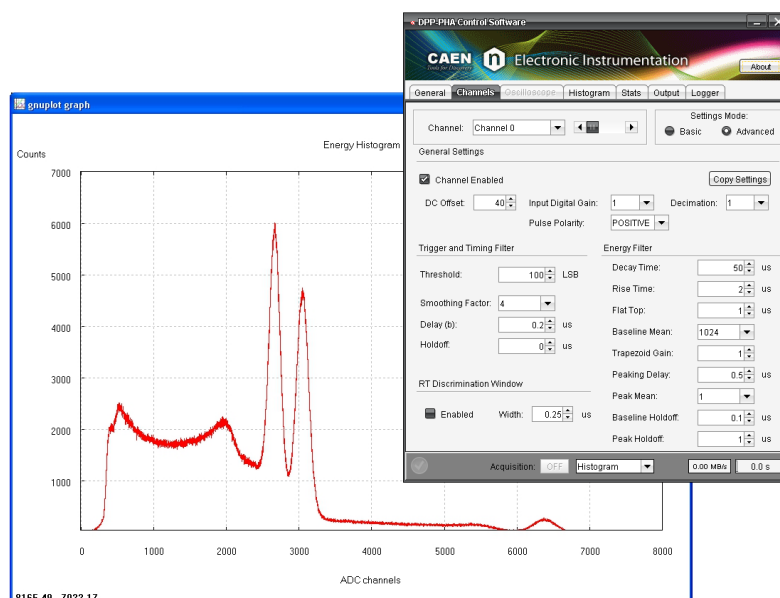


Fig. 4.5: DPP Control Software Graphical User Interface and Energy plot

---

## 5. Installation

- The Mod. V1751 fits into 6U VME crates.
- **The V1751 cannot be operated with CAEN crates VME8001/8002**
- VX1751 versions require VME64X compliant crates
- Use only crates with forced cooling air flow
- Turn the crate OFF before board insertion/removal
- Remove all cables connected to the front panel before board insertion/removal



### CAUTION

**USE ONLY CRATES WITH FORCED COOLING AIR FLOW SINCE OVERHEAT MAY  
DAMAGE THE MODULE!**



### CAUTION

**ALL CABLES MUST BE REMOVED FROM THE FRONT PANEL  
BEFORE EXTRACTING THE BOARD FROM THE CRATE!**

---

### 5.1. Power ON sequence

To power ON the board follow this procedure:

1. insert the V1751 board into the crate
2. power up the crate

---

### 5.2. Power ON status

At power ON the module is in the following status:

- the Output Buffer is cleared;
- registers are set to their default configuration

---

## 5.3. Firmware upgrade

The firmware of the V1751 is stored on an on-board FLASH memory. Two copies of the firmware are stored in two different pages of the FLASH, called Standard (STD) and Backup (BKP); at Power On, a microcontroller reads the Flash memory and programs the module with the firmware version selected via the JP2 jumper (see § 2.6) which can be placed either on the STD position (left), or in the BKP position (right).

It is possible to upgrade the board firmware via VME or Optical Link by writing the FLASH with CAENUpgrader software (see § 4). For instructions to use the program, please refer to the document:

*GD2512 - CAENUpgrader QuickStart Guide (web available)*

**It is strongly suggested to upgrade ONLY one of the stored firmware revisions (generally the STD one): if both revision are simultaneously updated and a failure occurs, it will not be possible to upload the firmware via VME or Optical Link again!**



---

### **5.3.1. V1751 Upgrade files description**

The board hosts one FPGA on the mainboard and one FPGA on each mezzanine (i.e. one FPGA per couple of adjacent channels). The channel FPGAs firmware is identical. A unique file is provided that will updated all the FPGA at the same time.

**ROC FPGA MAINBOARD FPGA** (Readout Controller + VME interface):  
FPGA Altera Cyclone EP1C20.

**AMC FPGA CHANNEL FPGA** (ADC readout/Memory Controller):  
FPGA Altera Cyclone EP3C16.

The programming file has the extension .CFA (CAEN Firmware Archive) and is a sort of archive format file aggregating all the standard firmware files compatible with the same family of digitizers.

CFA and its name follows this general scheme:

x751\_revX.Y\_W.Z.CFA

where:

- x751 are all the boards the file is compliant to: DT5751, N6751, V1751, VX1751
- X.Y is the major/minor revision number of the mainboard FPGA
- W.Z is the major/minor revision number of the channel FPGA

**WARNING:** in case of programming failures that compromise the communication with the board, a first recovering attempt can be performed by setting the jumper JP2 on the mainboard in the BKP position. If the communication is retrieved when the board is powered on in backup mode, the standard page of the FLASH can be then reprogrammed. If the problem still remains, please contact CAEN technical support (see § 6) for further instructions.



---

## 6. Technical support

CAEN makes available the technical support of its specialists at the e-mail addresses below:

[support.nuclear@caen.it](mailto:support.nuclear@caen.it)  
(for questions about the hardware)

[support.computing@caen.it](mailto:support.computing@caen.it)  
(for questions about software and libraries)